

Amphenol®

Military standard connectors

Bayonet coupling connectors

High tension connectors



Amphenol Daeshin Korea

Amphenol Corporation Worldwide



The Company

Amphenol Corporation is one of the world's largest designers, manufacturers and marketers of electrical, electronics and fiber optic connectors, interconnect systems and coaxial and flat-ribbon cable. The primary end markets for our products are in the fast growing segments of telephone, wireless and data communication systems; commercial and military aerospace electronics; cable television systems; automotive and mass transportation application; and industrial factory automation equipment.

Amphenol Daeshin Electronics Precision Ltd (ADS), located in Bucheon Korea, is a subsidiary of Amphenol corporation, a worldwide manufacturer and supplier of connector and interconnects products. We are supplying wide range of interconnect solution and design, manufacture, supply Mil-C-5015 style circular connectors. The primary end markets for ADS is Military, Aerospace and Industrial with full range of Amphenol product group.

Amphenol Daeshin Korea

Introduction



MS / Standard MIL-C-5015 Style Connector

Amphenol MIL-C-5015 connectors meet the latest performance requirements of MIL-C-5015.

These connectors represent well-proven electrical capability at an acceptable cost for most equipment where durability is important.

MIL-C-5015 features threaded coupling & single key & keyway polarization maximum simplicity in design.

Applications include industrial machines, military ground support equipment, ordnance & shipboard installation.

Amphenol MIL-C-5015 connectors are available in classes A, B, E/F, R, and also offers a range of pre-earth connectors.

Therefore, you will always find the right connector in Amphenol, with us, for conditions & performance requirements you may have.



ADGC Series(Bayonet Coupling Connectors)

The connectors presented in this catalog are identified as ADGC.

They are used principally in the transit rail industry and heavy applications;

Their main characteristic is the fast and precise coupling of the receptacle and plug connectors.

Three bayonet ramps on the receptacle allow for the fast and perfect mating with only a one quarter turn of the coupling nut.

ADGC Bayonet coupling connectors in accordance with VG95234.

They withstand exposure to moisture, oil and vibration.

Bayonet lock coupling.

ADGC series connectors meet the performance required for subway coupler applications.



AMHTC Series(Amphenol High Tension Connectors)

Amphenol "AMHTC", high tension connector series for railway vehicle installable power distribution systems, offers the ultimate in safety and reliability under the most severe operating conditions.

The AMHTC series connectors allow the user to connect electrical equipment quickly with ultimate safety.

AMHTC is available in two standard formats, which allow complete hook up through the standard daisy chain principle.

Amphenol Daeshin Korea

Introduction



By taking advantage of the expertise in connector production, we upgraded our capability to support railway requirements.

Currently our major railway parts are inter-vehicle jumpers for power and/or signal transmission, junction boxes and harness for traction motor.

We possess designing/engineering capability and resources to satisfy the requirements of railway customers and even those of railway operators.

We not only produce and supply those products but we also participate in designing stage with customer and provide optimal interconnection solution.

We have completed various railway projects with our own design and we are ready to propose reliable solution.

Table of Contents Page

ADS all products general information & Introduction
Amphenol® MS Standard Cylindrical MIL-C-5015 Type Connectors

General Information, Class Designations

MS-A General Information

MS3100A Wall mounting receptacle-dimension	9
MS3101A Cable connecting receptacle-dimension	10
MS3102A Box mounting receptacle-dimension	11
MS3106A Straight plug-dimension	12
MS3108A 90° Right angle plug-dimension	13

MS/DS-E/F General Information

MS3100E/F Wall mounting receptacle-dimension	15
MS3101E/F Cable connecting receptacle-dimension	16
MS3102E Box mounting receptacle-dimension	17
MS3106E/F Straight plug-dimension	18
MS3108E 90° Right angle plug-dimension	19

MS/DS-R General Information

MS3100R Wall mounting receptacle-dimension	21
MS3101R Cable connecting receptacle-dimension	22
MS3102R Box mounting receptacle-dimension	23
MS3106R Straight plug-dimension	24
MS3108R 90° Right angle plug-dimension	25

Insert Arrangements

MS-A.E(F).R class insert arrangement & Alternate Positioning	26, 27
MS-A.E(F).R Contact arrangements	28 ~ 37

MS Connector Accessories

MS25042 & MS25043 Protection cap	39
MS3057A cable clamp, MS3420 sleeve	40
Sealing gaskets & Panel mounting hole information	41
Solder contacts & Crimp contacts information	42
How to order for MS-Standard class	43

MS-B General Information

MS3101B Cable connecting receptacle-dimension	47
MS3102B Box mounting receptacle-dimension	48
MS3106B Straight plug-dimension	49
MS3108B 90° Right angle plug-dimension	50

Table of Contents Page

Insert Arrangements

MS-B class insert arrangement & Alternate Positioning	51
MS-B class contact arrangements	52 ~ 54
How to order for MS-B Class	55

MS-DL General Information

DL3102A Box mounting receptacle-dimension	59
DL3106A Straight plug-dimension	60
DL3108A 90° Right angle plug-dimension	61
DL/Standard insert arrangement & contact arrangement	62
MS3057A cable clamp, DL3420 sleeve & contact electrical data	63
How to order for DL- Class	64

ADG, ADGC General Information

ADG, ADGC00A Wall mounting receptacle-dimension	67
ADG, ADGC01A Cable connecting receptacle-dimension	68
ADG, ADGC02A Box mounting receptacle-dimension	69
ADG, ADGC06A Straight plug-dimension	70
ADG, ADGC08A 45° Right angle plug-dimension	71
ADG, ADGC Standard insert arrangement	72. 73
ADG, ADGC Special insert arrangement	74
ADG, ADGC Contact arrangements	75 ~ 85
ADG, ADGC Accessories information protection cap	86
Contacts information	87. 88
ADG, ADGC Characteristics	89
How to order for ADG,ADGC	90
ADG, ADGC Tool information	91

AMHTC General Information

ALPF Box mounting receptacle dimension	95
AMLM Straight plug dimension	95
HLPF Box mounting receptacle dimension	96
HLLM Straight plug dimension	96
SLPF Box mounting receptacle dimension	97
SLLM Straight plug dimension	97
AMTHC Accessories information	98
How to order for AMHTC	99
AMHTC Tool information	100



Amphenol MIL-C-5015 Connectors

MS General Information, Class Designations



DESIGN CHARACTERISTICS

- Medium to heavy weight cylindrical
- Durable, field-proven design
- Environmental resistant
- Resilient inserts
- Operating voltage to 3000 VAC (RMS) at sea level
- Threaded couplings
- Single key / keyway shell polarization
- Cost effective



CUSTOMER OPTIONS

- Five shell styles
- Fourteen shell sizes
- Five class designations
- Alternate insert positioning
- Zinc alloy plating (cadmium-free) available



MS connectors meet the latest performance requirements of MIL-C-5015.

These connectors represent well proven electrical capability at an acceptable cost for most equipment where durability is important.

MIL-C-5015 features threaded couplings and single key/ keyway polarization, representing maximum simplicity in design.

Applications include military ground support equipment, ordnance and shipboard installations.

Amphenol Industrial Operations manufactures five classes of connectors to meet different requirements.


Class designations and brief descriptions are listed below.

A - Solid Shell - for general, non-environmental applications.

B - Split end bell, for general, non-environmental applications.

E/F - Environmental Resisting with Strain Relief-designed for applications where the connector will be exposed to moisture, vibration, and rapid changes in pressure and temperature.

R - Lightweight Environmental Resisting-shorter in length and lighter in weight than the E and F classes, the MS-R offers a high degree of reliability under adverse conditions: recommended for new design applications.





**MS/Standard
A,E(F),R Class**

Amphenol MIL-C-5015 Connectors MS-A Class



Wall Mounting Receptacle



Cable connecting Receptacle



Box Mounting Receptacle



Straight Plug



Right Angle Plug

MS-A

MS-A class connectors perform many of the virtual functions in powering, testing and ground support system. Class A applications include communication equipment, computers and shipboard installation where mechanical forces and physical parameters are not subject to extreme or rapid environmental changes.

Shells:

Shell components are fabricated from high grade aluminum alloy.

Electrically Zinc plate finish with an olive drab chromate after treatment offers corrosion resistance.

Contacts:

Pins and sockets are machined from copper alloy with silver plated finish.

Size 16 and 12 socket contacts incorporate a closed entry design.

Inserts:


Inserts are resilient synthetic rubber, offering high dielectric strength, high arc resistance to vibration.

Proprietary design permits pressurization of either pin or socket insert.

Amphenol MIL-C-5015 Connectors

MS3100A

Wall mounting receptacle

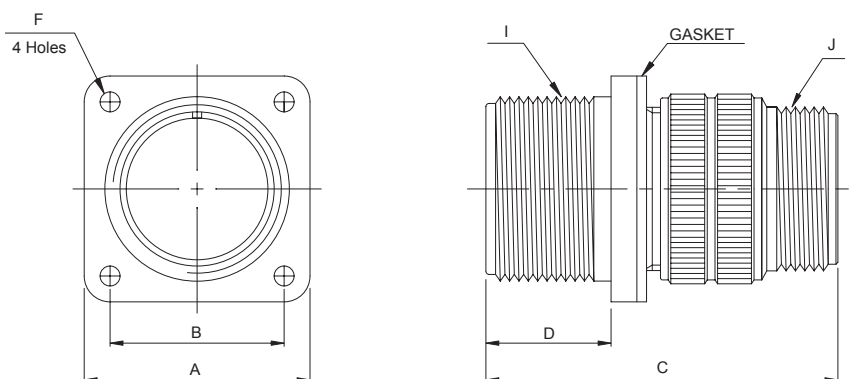

MS3100A wall mounting receptacles are used with the MS3057 cable clamp or with conduit to eliminate need for the conduit box in applications where wires are carried thru walls or bulkheads.


(mm)

Shell Size	□A ±0.79	□B ±0.12	C Max	D +0.79 -0.00	ØF +0.25 -0.12	I Thread-2A (UNEF)	J Thread-2A (UNEF)
10SL	25.40	18.26	38.88	14.28	3.20	5/8-24 NEF	5/8-24 NEF
12S	27.79	20.62	42.87	14.28	3.20	3/4-20 NEF	5/8-24 NEF
12	27.79	20.62	52.37	19.05	3.20	3/4-20 NEF	5/8-24 NEF
14S	30.18	23.01	42.87	14.28	3.20	7/8-20 NEF	3/4-20 NEF
14	30.18	23.01	52.37	19.05	3.20	7/8-20 NEF	3/4-20 NEF
16S	32.54	24.61	42.87	14.28	3.20	1-20 NEF	7/8-20 NEF
16	32.54	24.61	52.37	19.05	3.20	1-20 NEF	7/8-20 NEF
18	34.93	26.97	52.37	19.05	3.20	1 1/8-18 NEF	1-20 NEF
20	38.10	29.36	55.57	19.05	3.20	1 1/4-18 NEF	1 3/16-18 NEF
22	41.28	31.75	55.57	19.05	3.20	1 3/8-18 NEF	1 3/16-18 NEF
24	44.45	34.93	58.72	20.63	3.73	1 1/2-18 NEF	1 7/16-18 NEF
28	50.80	39.67	58.72	20.63	3.73	1 3/4-18 NS	1 7/16-18 NEF
32	57.15	44.45	67.92	22.23	4.39	2-18 NS	1 3/4-18 NS
36	63.50	49.23	67.92	22.23	4.39	2 1/4-16 UN	2-18 NS

Amphenol MIL-C-5015 Connectors

MS3101A

Cable Connecting Receptacle

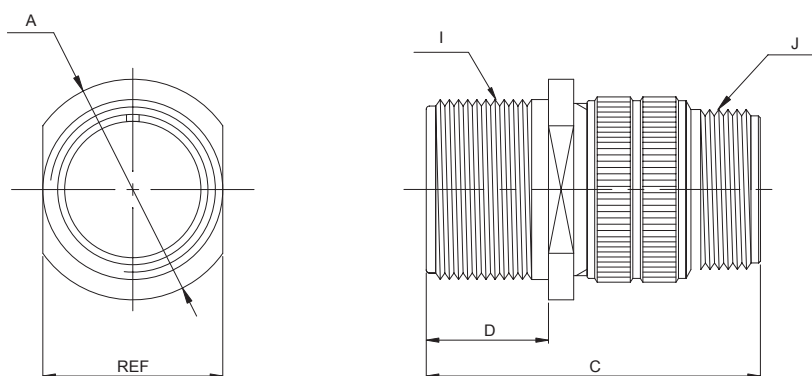

MS3101A solid endbell cable connecting receptacles are used for cable extension requirements where mounting provisions are unnecessary.

(mm)


Shell Size	Ø A Max	C Max	D +0.79 -0.00	I Thread-2A (UNEF)	J Thread-2A (UNEF)
10SL	24.61	38.88	14.28	5/8-24 NEF	5/8-24 NEF
12S	26.97	42.87	14.28	3/4-20 NEF	5/8-24 NEF
12	26.97	52.37	19.05	3/4-20 NEF	5/8-24 NEF
14S	29.36	42.87	14.28	7/8-20 NEF	3/4-20 NEF
14	29.36	52.37	19.05	7/8-20 NEF	3/4-20 NEF
16S	31.75	42.87	14.28	1-20 NEF	7/8-20 NEF
16	31.75	52.37	19.05	1-20 NEF	7/8-20 NEF
18	34.13	52.37	19.05	1 1/8-18 NEF	1-20 NEF
20	37.31	55.57	19.05	1 1/4-18 NEF	1 3/16-18 NEF
22	40.48	55.57	19.05	1 3/8-18 NEF	1 3/16-18 NEF
24	43.66	58.72	20.63	1 1/2-18 NEF	1 7/16-18 NEF
28	50.01	58.72	20.63	1 3/4-18 NS	1 7/16-18 NEF
32	56.36	67.92	22.23	2-18 NS	1 3/4-18 NS
36	62.71	67.92	22.23	2 1/4-16 UN	2-18 NS

Amphenol MIL-C-5015 Connectors

MS3102A

BOX Mounting Receptacle

(Available with Plastic or Rubber insulators)

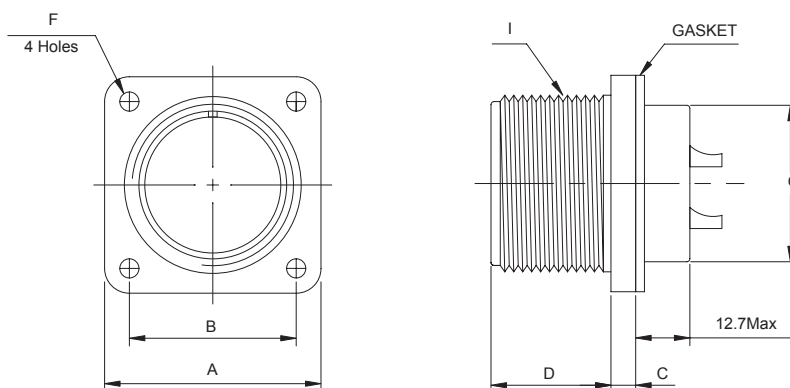

MS3102A box mounting receptacles are used on boxes and equipment cases where no cable support is required.


(mm)

Shell Size	□A ±0.79	□B ±0.12	C ±0.50	D +0.79 -0.00	ØF +0.25 -0.12	ØG Max	I Thread-2A (UNEF)
10SL	25.40	18.26	3.00	14.28	3.05	16.00	5/8-24 NEF
12S	27.80	20.62	3.00	14.28	3.05	16.50	3/4-20 NEF
12	27.80	20.62	3.00	19.05	3.05	16.50	3/4-20 NEF
14S	30.20	23.01	3.00	14.28	3.05	20.00	7/8-20 NEF
14	30.20	23.01	3.00	19.05	3.05	20.00	7/8-20 NEF
16S	32.50	24.61	3.00	14.28	3.05	23.00	1-20 NEF
16	32.50	24.61	3.00	19.05	3.05	23.00	1-20 NEF
18	34.90	26.97	4.00	19.05	3.05	26.00	1 1/8-18 NEF
20	38.10	29.36	4.00	19.05	3.05	29.00	1 1/4-18 NEF
22	41.30	31.75	4.00	19.05	3.05	32.50	1 3/8-18 NEF
24	44.50	34.93	4.00	20.63	3.73	35.50	1 1/2-18 NEF
28	50.80	39.67	4.00	20.63	3.73	42.00	1 3/4-18 NEF
32	57.20	44.45	4.00	22.23	4.39	48.00	2-18 NS
36	63.50	49.23	4.00	22.23	4.39	54.50	2 1/4-16 UN

Amphenol MIL-C-5015 Connectors

MS3106A

Straight Plug

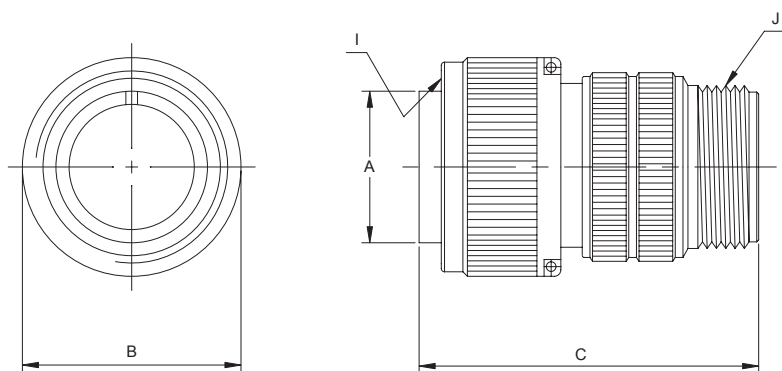

MS3106A straight plugs are used with 3100, 3101 and 3102 receptacles.


(mm)

Shell Size	Ø A +0.00 -0.38	Ø B Max	C Max	I Thread-2B (UNEF)	J Thread-2A (UNEF)
10SL	11.33	24.61	38.88	5/8-24 NEF	5/8-24 NEF
12S	14.10	26.97	42.87	3/4-20 NEF	5/8-24 NEF
12	14.10	26.97	52.37	3/4-20 NEF	5/8-24 NEF
14S	17.15	29.36	42.87	7/8-20 NEF	3/4-20 NEF
14	17.15	29.36	52.37	7/8-20 NEF	3/4-20 NEF
16S	20.45	31.75	42.87	1-20 NEF	7/8-20 NEF
16	20.45	31.75	52.37	1-20 NEF	7/8-20 NEF
18	23.62	34.13	52.37	1 1/8-18 NEF	1-20 NEF
20	26.67	37.31	55.57	1 1/4-18 NEF	1 3/16-18 NEF
22	29.85	40.48	55.57	1 3/8-18 NEF	1 3/16-18 NEF
24	33.02	43.66	58.72	1 1/2-18 NEF	1 7/16-18 NEF
28	38.61	50.01	58.72	1 3/4-18 NS	1 7/16-18 NEF
32	44.96	56.36	67.92	2-18 NS	1 3/4-18 NS
36	50.29	62.71	67.92	2 1/4-16 UN	2-18 NS

Amphenol MIL-C-5015 Connectors

MS3108A

Right Angle Plug

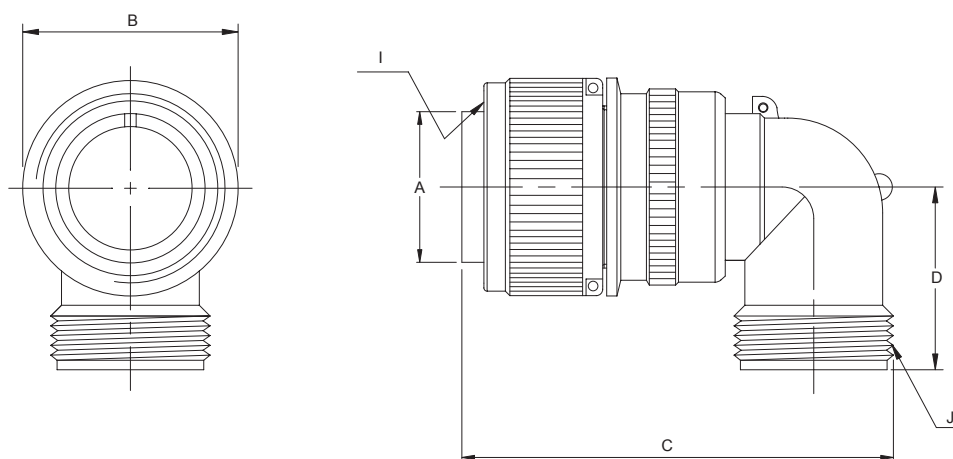

MS3108A Right Angle plugs, have a solid endbell and are used where wire must be brought at an abrupt angle. Either the split or solid endbells on the 3108 are capable of being rotated and locked.

(mm)

Shell Size	Ø A +0.00 -0.38	Ø B Max	C Max	D Max	I Thread-2B (UNEF)	J Thread-2A (UNEF)
10SL	11.33	24.61	46.02	25.40	5/8-24 NEF	5/8-24 NEF
12S*	14.10	26.97	50.80	26.90	3/4-20 NEF	5/8-24 NEF
12	14.10	26.97	57.15	26.90	3/4-20 NEF	5/8-24 NEF
14S	17.15	29.36	53.97	28.50	7/8-20 NEF	3/4-20 NEF
14	17.15	29.36	58.72	28.50	7/8-20 NEF	3/4-20 NEF
16S	20.45	31.75	60.32	30.10	1-20 NEF	7/8-20 NEF
16	20.45	31.75	65.07	30.10	1-20 NEF	7/8-20 NEF
18	23.62	34.13	68.27	33.30	1 1/8-18 NEF	1-20 NEF
20	26.67	37.71	76.98	34.90	1 1/4-18 NEF	1 3/16-18 NEF
22	29.85	40.48	76.98	34.90	1 3/8-18 NEF	1 3/16-18 NEF
24	33.02	43.66	86.51	39.60	1 1/2-18 NEF	1 7/16-18 NEF
28	38.61	50.01	86.51	39.60	1 3/4-18 NS	1 7/16-18 NEF
32	44.96	56.36	95.25	47.60	2-18 NS	1 3/4-18 NS
36	50.29	62.71	100.02	52.30	2 1/4-16 UN	2-18 NS

* No Tooling

Amphenol MIL-C-5015 Connectors MS/DS-E/F Class



Wall Mounting Receptacle



Cable connecting Receptacle



Box Mounting Receptacle



Straight Plug



Right Angle Plug

These MS connectors satisfy all the performance requirements of MIL-C-5015 and are recommended for conditions where vibration, moisture, pressure and/ or temperature and extreme. Strain relief is supplied on most shell sizes.

Shells:

Shell components are fabricated from high grade aluminum alloy.

The standard hardware plating is electrically zinc plated finish with an olive drab chromate after treatment for corrosion resistance.

Consult Amphenol Daeshin for other plating options.

Contacts:

Contacts are silver plated copper alloy for maximum corrosion resistance, maximum current carrying capacity and low millivolt drop.

Size 16 and 12 socket contacts incorporate a closed entry design.

Inserts:

Inserts are resilient synthetic rubber, offering high dielectric strength, high arc resistance arc resistance to vibration.

Proprietary design permits pressurization of either pin or socket insert.


Strain relief clamp:

Strain relief clamp minimizes tension at the solder well connection and provides a positive mechanical moisture seal.

Complete field serviceability is possible with the strain relief clamp.

Amphenol MIL-C-5015 Connectors MS3100E(F)

Wall Mounting Receptacle Integral Cable Clamp

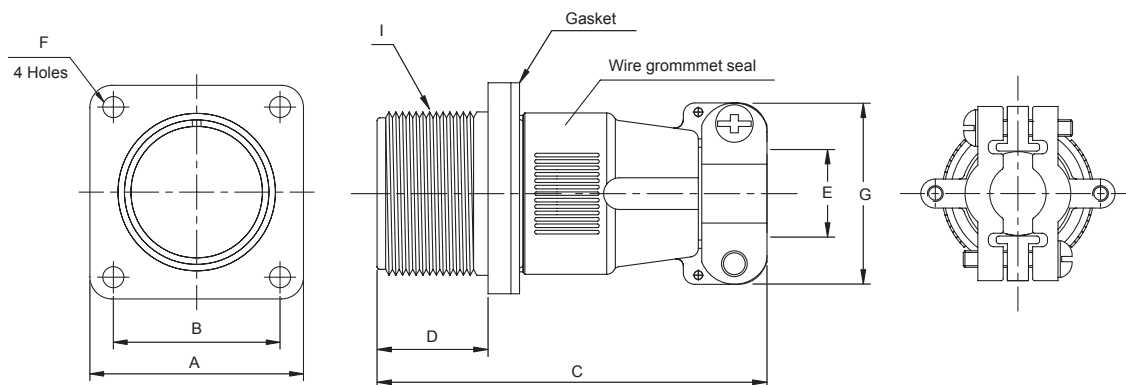

MS3100E/F wall mounting receptacles are used to carry wires thru walls or bulkheads, or to provide a means of disconnection at a bulkhead MS 3100E/F receptacles mate with 3106 and 3108 plugs.


(mm)

Shell Size	□ A ±0.79	□ B ±0.12	C Max	D +0.79 -0.00	Ø E Max	Ø F +0.25 -0.12	Ø G Max	I Thread-2A (UNEF)
10SL	25.40	18.26	57.15	14.28	7.90	3.05	23.0	5/8-24 NEF
12S	27.79	20.62	57.15	14.28	7.90	3.05	23.0	3/4-20 NEF
12	27.79	20.62	66.67	19.05	7.90	3.05	23.0	3/4-20 NEF
14S	30.18	23.01	57.15	14.28	11.2	3.05	26.0	7/8-20 NEF
14	30.18	23.01	66.67	19.05	11.2	3.05	26.0	7/8-20 NEF
16S	32.54	24.61	57.15	14.28	14.2	3.05	29.0	1-20 NEF
16	32.54	24.61	66.67	19.05	14.2	3.05	29.0	1-20 NEF
18	34.93	26.97	68.27	19.05	16.0	3.05	31.6	1 1/8-18 NEF
20	38.10	29.36	69.85	19.05	19.1	3.05	37.5	1 1/4-18 NEF
22	41.28	31.75	69.85	19.05	19.1	3.05	37.5	1 3/8-18 NEF
24	44.45	34.93	75.41	20.63	23.8	3.73	43.0	1 1/2-18 NEF
28	50.80	39.67	76.98	20.63	23.8	3.73	43.0	1 3/4-18 NS
32	57.15	44.45	76.98	22.23	32.0	4.39	52.0	2-18 NS
36	63.50	49.23	83.33	22.23	35.0	4.39	58.0	2 1/4-16 UN

Amphenol MIL-C-5015 Connectors

MS3101E(F)

Cable Connecting Receptacle
Integral Cable Clamp

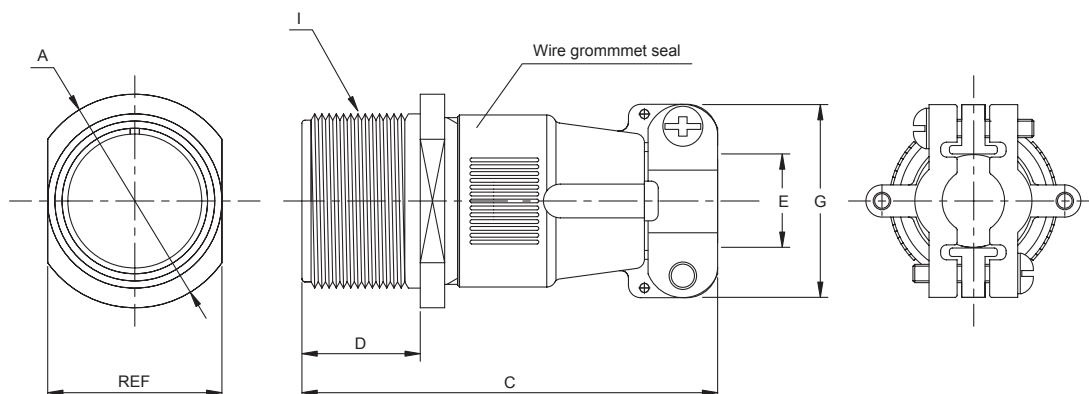

MS3101E/F cable connecting receptacles are used for cable extension requirements, where mounting provisions are unnecessary. MS3101E/F receptacles mate with 3106 and 3108 plugs.


(mm)

Shell Size	A Max	C Max	D +0.79 -0.00	Ø E Max	Ø G Max	I Thread-2A (UNEF)
10SL	25.40	57.15	14.28	7.9	23.0	5/8-24 NEF
12S	27.79	57.15	14.28	7.9	23.0	3/4-20 NEF
12	27.79	66.67	19.05	7.9	23.0	3/4-20 NEF
14S	30.18	57.15	14.28	11.2	26.0	7/8-20 NEF
14	30.18	66.67	19.05	11.2	26.0	7/8-20 NEF
16S	32.54	57.15	14.28	14.2	29.0	1-20 NEF
16	32.54	66.67	19.05	14.2	29.0	1-20 NE
18	34.93	68.27	19.05	16.0	31.6	1 1/8-18 NEF
20	38.10	69.85	19.05	19.1	37.5	1 1/4-18 NEF
22	41.28	69.85	19.05	19.1	37.5	1 3/8-18 NEF
24	44.45	75.41	20.63	23.8	43.0	1 1/2-18 NEF
28	50.80	76.98	20.63	23.8	43.0	1 3/4-18 NS
32	57.15	76.98	22.23	32.0	52.0	2-18 NS
36	63.50	83.33	22.23	35.0	58.0	2 1/4-16 UN

Amphenol MIL-C-5015 Connectors

MS3102E

Box Mounting Receptacle

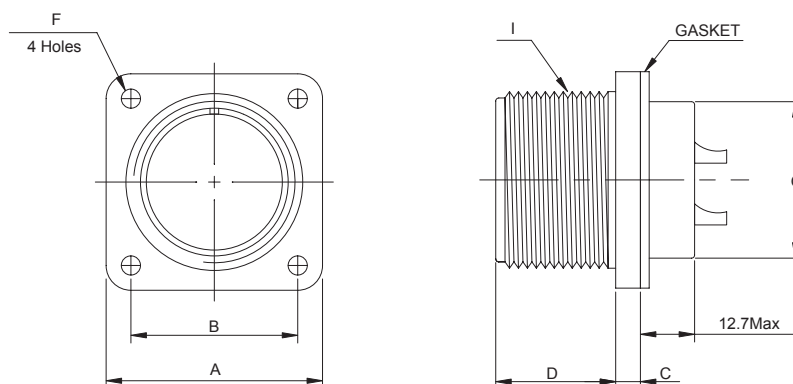

MS3102E box mounting receptacles are used in junction boxes or as an integral part of equipment. These connectors are identical with 3102A in construction.

(mm)


Shell Size	□A ±0.79	□B ±0.12	C ±0.5	D +0.79 -0.00	Ø F +0.25 -0.12	Ø G Max	I Thread-2A (UNEF)
10SL	25.40	18.26	3.0	14.28	3.05	16.0	5/8-24 NEF
12S	27.79	20.62	3.0	14.28	3.05	16.5	3/4-20 NEF
12	27.79	20.62	3.0	19.05	3.05	16.5	3/4-20 NEF
14S	30.18	23.01	3.0	14.28	3.05	20.0	7/8-20 NEF
14	30.18	23.01	3.0	19.05	3.05	20.0	7/8-20 NEF
16S	32.54	24.61	3.0	14.28	3.05	23.0	1-20 NEF
16	32.54	24.61	3.0	19.05	3.05	23.0	1-20 NEF
18	34.93	26.97	4.0	19.05	3.05	26.0	1 1/8-18 NEF
20	38.10	29.36	4.0	19.05	3.05	29.0	1 1/4-18 NEF
22	41.28	31.75	4.0	19.05	3.05	32.5	1 3/8-18 NEF
24	44.45	34.93	4.0	20.63	3.73	35.5	1 1/2-18 NEF
28	50.80	39.67	4.0	20.63	3.73	42.0	1 3/4-18 NS
32	57.15	44.45	4.0	22.23	4.39	48.0	2-18 NS
36	63.50	49.23	4.0	22.23	4.39	54.5	2 1/4-16 UN

Amphenol MIL-C-5015 Connectors

MS3106E(F)

Straight Plug

Integral Cable Clamp

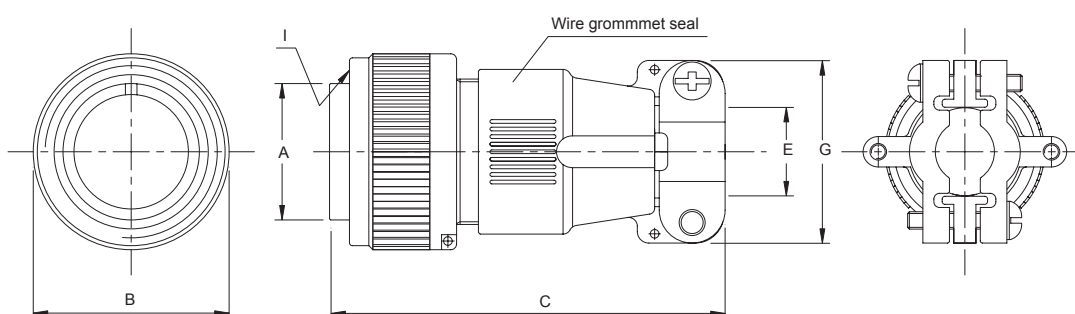

MS3106E/F straight plugs mate with 3100,3101 and 3102 receptacles


(mm)

Shell Size	A +0.00 -0.38	B Max	C Max	Ø E Max	Ø G Max	I Thread-2B (UNEF)
10SL	11.33	24.61	57.15	7.9	23.0	5/8-24 NEF
12S	14.10	26.97	57.15	7.9	23.0	3/4-20 NEF
12	14.10	26.97	66.67	7.9	23.0	3/4-20 NEF
14S	17.15	29.36	57.15	11.2	26.0	7/8-20 NEF
14	17.15	29.36	66.67	11.2	26.0	7/8-20 NEF
16S	20.45	31.75	57.15	14.2	29.0	1-20 NEF
16	20.45	31.75	66.67	14.2	29.0	1-20 NEF
18	23.62	34.13	68.27	16.0	31.6	1 1/8-18 NEF
20	26.67	37.31	69.85	19.1	37.5	1 1/4-18 NEF
22	29.85	40.48	69.85	19.1	37.5	1 3/8-18 NEF
24	33.02	43.66	75.41	23.8	43.0	1 1/2-18 NEF
28	38.61	50.01	76.98	23.8	43.0	1 3/4-18 NS
32	44.96	56.36	76.98	32.0	52.0	2-18 NS
36	50.29	62.71	83.33	35.0	58.0	2 1/4-16 UN

Amphenol MIL-C-5015 Connectors

MS3108E

Right Angle Plug

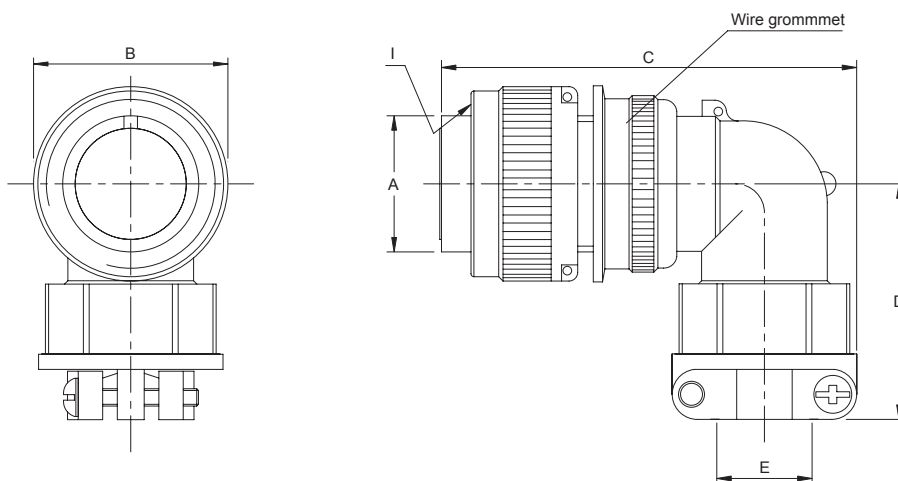

MS3108E Right angle plugs are used where there is limited space and where wires must be brought at abrupt angles. This plug mate with 3100, 3101 and 3102 receptacles

(mm)

Shell Size	A +0.00 -0.38	B Max	C Max	D Max	Ø E Max	I Thread-2B (UNEF)
10SL	11.33	24.61	55.57	38.1	7.9	5/8-24 NEF
12S*	14.10	26.97	55.57	38.1	7.9	3/4-20 NEF
12*	14.10	26.97	64.28	38.1	7.9	3/4-20 NEF
14S	17.15	29.36	58.72	40.4	11.2	7/8-20 NEF
14	17.15	29.36	68.27	40.4	11.2	7/8-20 NEF
16S	20.45	31.75	61.11	42.8	14.2	1-20 NEF
16	20.45	31.75	70.63	42.8	14.2	1-20 NEF
18	23.62	34.13	72.23	45.2	16.0	1 1/8-18 NEF
20	26.67	37.31	82.55	50.0	19.1	1 1/4-18 NEF
22	29.85	40.48	82.55	50.8	19.1	1 3/8-18 NEF
24	33.02	43.66	94.46	53.9	23.8	1 1/2-18 NEF
28	38.61	50.01	94.46	55.5	23.8	1 3/4-18 NS
32	44.96	56.36	106.37	65.8	32.0	2-18 NS
36	50.29	62.71	109.14	69.0	35.0	2 1/4-16 UN

* No Tooling

Amphenol MIL-C-5015 Connectors MS/DS R-Class



Wall Mounting Receptacle



Cable connecting Receptacle



Box Mounting Receptacle



Straight Plug



Right Angle Plug

Specification requirements for greater reliability in a shorter, lighter weight environmental resistant connector led to the design of the MS-R.

These low profile assemblies were attained by moving the axial compression nut and grommet assembly forward and flash with the rear of the insert.

The silicon rubber grommet, with its low coefficient of friction, assures easier threading of wire bundles and quicker assembly and serviceability of the unit.

Molded webs in each wire hole insure a moisture barrier around each wire.

The addition 'O'ring at the main joint of all MS3106R plugs provide a main joint seal supplementary to interfacial seal, thus insuring of higher degree of reliability when connectors halves from different sources are employed.

MS-R types are recommended for new design applications.

Shells:

Shell component are fabricated from high grade aluminum alloy. All components have the standard electrically zinc plated finish with an olive drab chromate after treatment for corrosion resistance. Consult Amphenol Daeshin for other plating options.

Contacts:

Contacts are machined from copper alloy for maximum current carrying capacity and low millivolt drop.


Inserts:

Resilient synthetic rubber insert provide an outstanding moisture barrier, maximum vibration resistance and high dielectric strength. Either pin or socket insert can be pressurized.

Amphenol MIL-C-5015 Connectors

MS3100R

Wall Mounting Receptacle

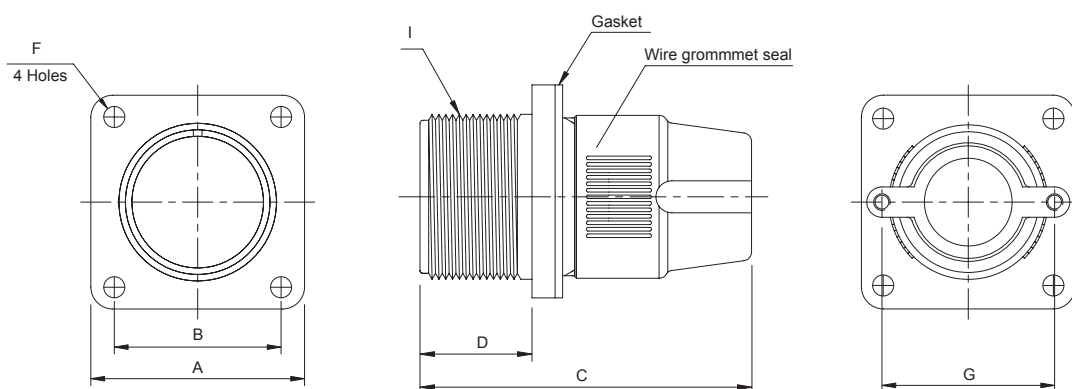

MS3100R receptacles are identical in purpose to the MS3100F.
The MS3100R features a shorter lightweight endbell.


(mm)

Shell Size	□A ±0.79	□B ±0.12	C Max	D +0.79 -0.00	G ±0.12	Ø F +0.25 -0.12	I Thread-2A (UNEF)
10SL	25.40	18.26	46.68	14.28	19.0	3.05	5/8-24 NEF
12S	27.79	20.62	46.68	14.28	19.0	3.05	3/4-20 NEF
12	27.79	20.62	55.39	19.05	19.0	3.05	3/4-20 NEF
14S	30.18	23.01	46.68	14.28	22.6	3.05	7/8-20 NEF
14	30.18	23.01	66.67	19.05	22.6	3.05	7/8-20 NEF
16S	32.54	24.61	46.68	14.28	26.2	3.05	1-20 NEF
16	32.54	24.61	55.39	19.05	26.2	3.05	1-20 NEF
18	34.93	26.97	57.93	19.05	31.2	3.05	1 1/8-18 NEF
20	38.10	29.36	57.93	19.05	34.3	3.05	1 1/4-18 NEF
22	41.28	31.75	57.93	19.05	39.8	3.05	1 3/8-18 NEF
24	44.45	34.93	57.93	20.63	40.5	3.73	1 1/2-18 NEF
28	50.80	39.67	57.93	20.63	40.5	3.73	1 3/4-18 NS
32	57.15	44.45	57.93	22.23	48.0	4.39	2-18 NS
36	63.50	49.23	58.97	22.23	53.0	4.39	2 1/4-16 UN

Amphenol MIL-C-5015 Connectors

MS3101R

Cable Connecting Receptacle
(Receptacle with no mounting flange)

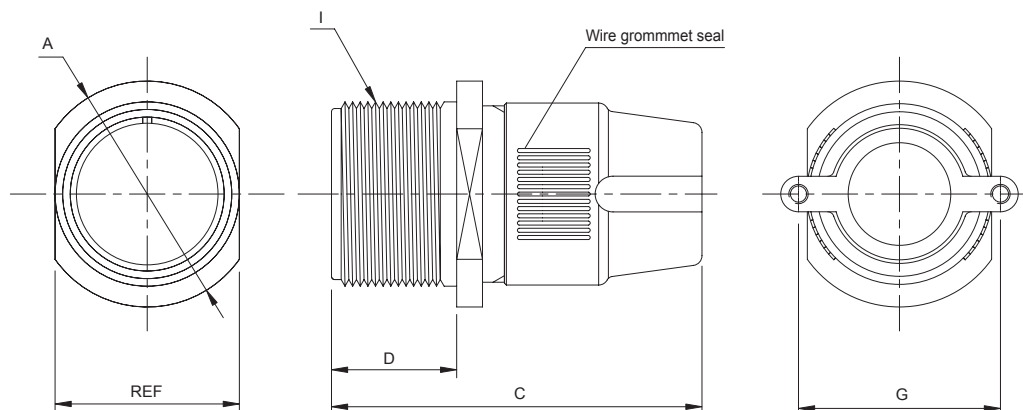

MS3101R cable connecting receptacles are identical in purpose to the MS3101E.
The MS3101R features a shorter lightweight endbell.


(mm)

Shell Size	A Max	C Max	D +0.79 -0.00	G ± 0.12	I Thread-2A (UNEF)
10SL	24.61	46.68	14.28	19.0	5/8-24 NEF
12S	26.97	46.68	14.28	19.0	3/4-20 NEF
12	26.97	55.39	19.05	19.0	3/4-20 NEF
14S	29.36	46.68	14.28	22.6	7/8-20 NEF
14	29.36	55.39	19.05	22.6	7/8-20 NEF
16S	31.75	46.68	14.28	26.2	1-20 NEF
16	31.75	55.39	19.05	26.2	1-20 NEF
18	34.13	57.93	19.05	31.2	1 1/8-18 NEF
20	37.31	57.93	19.05	34.3	1 1/4-18 NEF
22	40.48	57.93	19.05	39.8	1 3/8-18 NEF
24	43.66	57.93	20.63	40.5	1 1/2-18 NEF
28	50.01	57.93	20.63	40.5	1 3/4-18 NS
32	56.36	57.93	22.23	48.0	2-18 NS
36	62.71	58.97	22.23	53.0	2 1/4-16 UN

Amphenol MIL-C-5015 Connectors

MS3102R

Box Mounting Receptacle

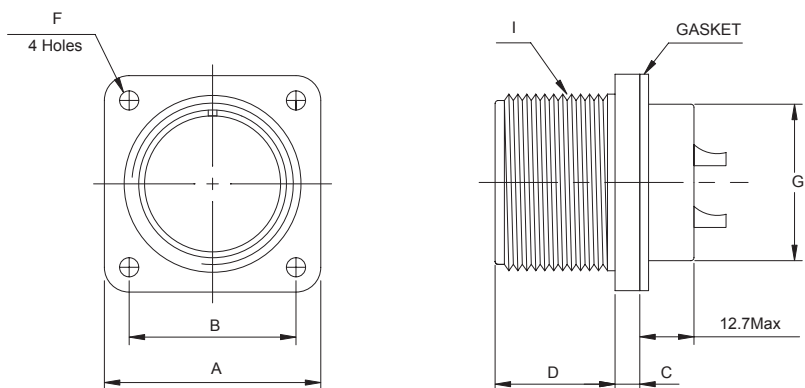

MS3102R box mounting receptacles are used in junction boxes or as an integral part of equipment. These connectors are identical with 3102A in construction.


(mm)

Shell Size	□A ±0.79	□B ±0.12	C ±0.5	D +0.79 -0.00	Ø F +0.25 -0.12	Ø G Max	I Thread-2A (UNEF)
10SL	25.40	18.26	3.0	14.28	3.05	16.0	5/8-24 NEF
12S	27.79	20.62	3.0	14.28	3.05	16.5	3/4-20 NEF
12	27.79	20.62	3.0	19.05	3.05	16.5	3/4-20 NEF
14S	30.18	23.01	3.0	14.28	3.05	20.0	7/8-20 NEF
14	30.18	23.01	3.0	19.05	3.05	20.0	7/8-20 NEF
16S	32.54	24.61	3.0	14.28	3.05	23.0	1-20 NEF
16	32.54	24.61	3.0	19.05	3.05	23.0	1-20 NEF
18	34.93	26.97	4.0	19.05	3.05	26.0	1 1/8-18 NEF
20	38.10	29.36	4.0	19.05	3.05	29.0	1 1/4-18 NEF
22	41.28	31.75	4.0	19.05	3.05	32.0	1 3/8-18 NEF
24	44.45	34.93	4.0	20.63	3.73	35.5	1 1/2-18 NEF
28	50.80	39.67	4.0	20.63	3.73	42.0	1 3/4-18 NS
32	57.15	44.45	4.0	22.23	4.39	48.0	2-18 NS
36	63.50	49.23	4.0	22.23	4.39	55.0	2 1/4-16 UN

Amphenol MIL-C-5015 Connectors

MS3106R

Straight Plug

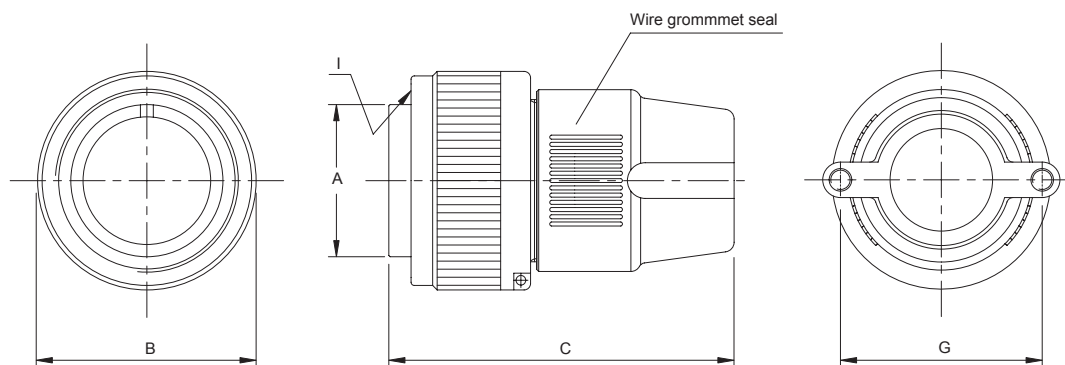

MS3106R straight plugs are identical in purpose to the MS3106F.
The MS3106R has the shorter endbell.


(mm)

Shell Size	A +0.00 -0.38	B Max	C Max	G ±0.12	I Thread-2B (UNEF)
10SL	11.33	24.61	46.68	19.0	5/8-24 NEF
12S	14.10	26.97	46.68	19.0	3/4-20 NEF
12	14.10	26.97	55.39	19.0	3/4-20 NEF
14S	17.15	29.36	46.68	22.6	7/8-20 NEF
14	17.15	29.36	55.39	22.6	7/8-20 NEF
16S	20.45	31.75	46.68	26.2	1-20 NEF
16	20.45	31.75	55.39	26.2	1-20 NEF
18	23.62	34.13	57.93	31.2	1 1/8-18 NEF
20	26.67	37.31	57.93	34.3	1 1/4-18 NEF
22	29.85	40.48	57.93	39.8	1 3/8-18 NEF
24	33.02	43.66	57.93	40.5	1 1/2-18 NEF
28	38.61	50.01	57.93	40.5	1 3/4-18 NS
32	44.96	56.36	57.93	48.0	2-18 NS
36	50.29	62.71	58.97	53.0	2 1/4-16 UN

Amphenol MIL-C-5015 Connectors

MS3108R

Right Angle Plug

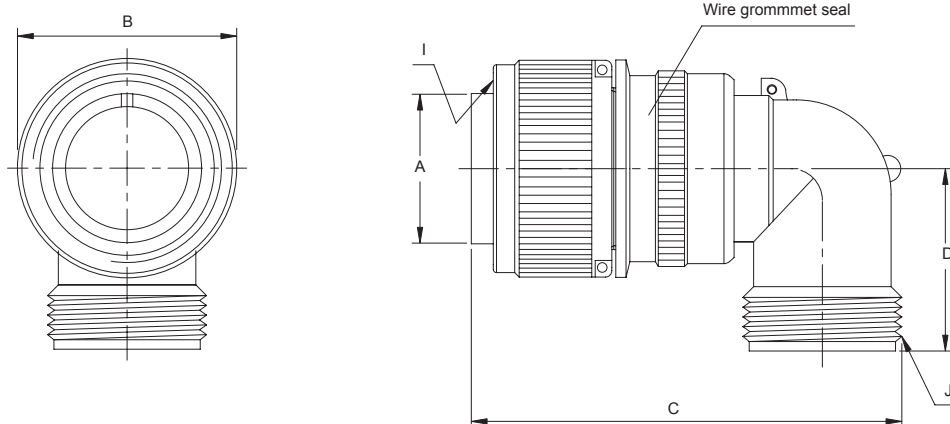

MS3108R Right angle plugs are used where there is limited space and where wires must be brought at abrupt angles.

(mm)


Shell Size	Ø A +0.00 -0.38	Ø B +0.00 -0.38	C Max	D Max	I Thread-2B (UNEF)	J Thread-2A (UNEF)
10SL	11.33	24.61	46.02	25.4	5/8-24 NEF	5/8-24NEF
12S*	14.10	26.97	50.80	26.9	3/4-20 NEF	5/8-24 NEF
12*	14.10	26.97	57.15	26.9	3/4-20 NEF	5/8-24 NEF
14S	17.15	29.36	53.97	28.5	7/8-20 NEF	3/4-20 NEF
14	17.15	29.36	58.72	28.5	7/8-20 NEF	3/4-20 NEF
16S	20.45	31.75	60.32	30.1	1-20 NEF	7/8-20 NEF
16	20.45	31.75	65.07	30.1	1-20 NEF	7/8-20 NEF
18	23.62	34.13	68.27	33.3	1 1/8-18 NEF	1-20 NEF
20	26.67	37.31	76.98	34.9	1 1/4-18 NEF	1 3/16-18 NEF
22	29.85	40.48	76.98	34.9	1 3/8-18 NEF	1 3/16-18 NEF
24	33.02	43.66	86.51	39.6	1 1/2-18 NEF	1 7/16-18 NEF
28	38.61	50.01	86.51	39.6	1 3/4-18 NS	1 7/16-18 NEF
32	44.96	56.36	95.25	47.6	2-18 NS	1 3/4-18 NS
36	50.29	62.71	100.02	52.3	2 1/4-16 UN	2-18 NS

* No tooling

Amphenol MIL-C-5015 Connectors

MS- A,E/F,R Class

Insert Arrangements & Alternate Positioning

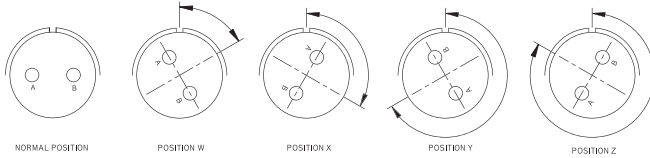


Contact Arrange- ment	Service Rating	Total Contacts	Contact Size					Alternate Position- Degrees			
			0	4	8	12	16	W	X	Y	Z
10SL-2	A	1					1	-	-	-	-
10SL-3	A	3					3	-	-	-	-
10SL-4	A	2					2	63	-	-	-
12S-1	A	2					2	-	-	-	-
12S-3	A	2					2	70	145	215	290
12S-5	D	1				1		-	-	-	-
14S-1	A	3					3	-	-	-	-
14S-2	Inst	4					4	-	120	240	-
14S-5	Inst	5					5	-	110	-	-
14S-6	Inst	6					6	-	-	-	-
14S-7	A	3					3	90	180	270	-
14S-9	A	2					2	70	145	215	290
14S-07	A	7					7	-	-	-	-
16S-1	A	7					7	80	-	-	280
16S-4	D	2					2	35	110	250	325
16S-5	A	3					3	70	145	215	290
16S-8	A	5					5	-	170	265	-
16-9	A	4				2	2	35	110	250	325
16-10	A	3				3		90	180	270	-
16-11	A	2				2		35	110	250	325
16-12	A	1		1				-	-	-	-
16-13	A	2				2		35	110	250	325
18-1	A/Inst	10					10	70	145	215	290
18-3	D	2				2		35	110	250	325
18-4	D	4					4	35	110	250	325
18-5	D	3				2	1	80	110	250	280
18-8	A	8				1	7	70	-	-	290
18-9	Inst.	7				2	5	80	110	250	280
18-10	A	4				4		-	120	240	-
18-11	A	5				5		-	170	265	
18-12	A	6					6	80	-	-	280
18-13	A	4			1	3		80	110	250	280
18-15	A	4				4		-	120	240	-

Contact Arrange- ment	Service Rating	Total Contacts	Contact Size					Alternate Position- Degrees			
			0	4	8	12	16	W	X	Y	Z
18-19	A	10					10	-	120	240	-
18-20	A	5					5	90	180	270	-
18-21	A	3				3		-	-	-	-
18-22	D	3					3	70	145	215	290
18-32	A	8					8	-	-	-	-
20-2	D	1	1					-	-	-	-
20-3	D	3				3		40	145	215	290
20-4	D	4				4		45	110	250	-
20-7	D/A	8					8	80	110	250	280
20-8	Inst.	6			2		4	80	110	250	280
20-11	Inst.	13					13	-	-	-	-
20-15	A	7				7		80	-	-	280
20-16	A	9				2	7	80	110	250	280
20-17	A	6				5	1	90	180	270	-
20-18	A	9				3	6	35	110	250	325
20-19	A	3			3			90	180	270	-
20-22	A	6			3		3	80	110	250	280
20-23	A	2			2			35	110	250	325
20-27	A	14					14	35	110	250	325
20-29	A	17					17	80	-	-	20
20-33	A	11					11	-	-	-	-
20-01	A	10					10	-	-	-	-
22-1	D	2			2			35	110	250	325
22-2	D	3			3			70	145	215	290
22-4	A	4			2	2		35	110	250	325
22-7	E	1	1					-	-	-	-
22-8	E	2				2		35	110	250	325
22-9	E	3				3		70	145	215	290
22-10	E	4					4	35	110	250	325
22-11	B	2					2	35	110	250	325
22-12	D	5			2		3	80	110	250	280
22-13	D/A	5				4	1	34	110	250	325
22-14	A	19					19	80	110	250	280

Amphenol MIL-C-5015 Connectors

MS- A,E/F,R Class

Insert Arrangements & Alternate Positioning

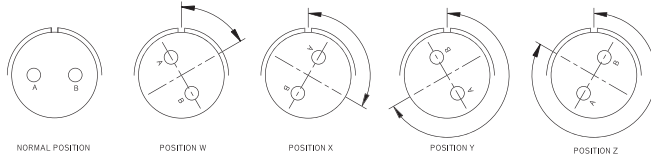

Contact Arrange-ment	Service Rating	Total Contacts	Contact Size					Alternate Position-Degrees			
			0	4	8	12	16	W	X	Y	Z
22-15	E/A	6				5	1	80	110	250	280
22-18	A/D	8					8	80	110	250	280
22-19	A	14					14	80	110	250	280
22-20	A	9					9	35	110	250	325
22-21	A	3	1				2	-	-	-	-
22-22	A	4			4			-	110	250	-
22-23	D/A	8				8		35	-	250	-
22-27	D/A	9			1		8	80	-	250	280
22-28	A	7				7		80	-	-	280
24-2	D	7				7		80	-	-	28
24-5	A	16					16	80	110	250	280
24-6	D/A	8				8		80	110	250	280
24-7	A	16				2	14	80	110	250	280
24-9	A	2		2				35	110	250	325
24-10	A	7			7			80	-	-	280
24-11	A	9			3	6		35	110	250	32
24-12	A	5		2		3		80	110	250	280
24-20	D	11				2	9	80	110	250	280
24-22	D	4			4			45	110	250	-
24-28	Inst	24					24	80	110	250	280
24-02	A	9				9		-	-	-	-
24-03	A	12					12	-	-	-	-
28-1	D/A	9			3	6		80	110	250	280
28-3	E	3			3			70	145	215	290
28-6	D	3		3				70	145	215	290
28-7	D	2		2				35	110	250	325
28-9	D	12				6	6	80	110	250	280
28-10	D/A	7		2	2	3		80	110	250	280
28-11	A	22				4	18	80	110	250	280
28-12	A	26					26	90	180	270	-
28-15	A	35					35	80	110	250	280
28-16	A	20					20	80	110	250	280
28-17	B/D/A	15					15	-	-	-	-

Contact Arrange-ment	Service Rating	Total Contacts	Contact Size					Alternate Position-Degrees			
			0	4	8	12	16	W	X	Y	Z
28-18	A	12					12	-	-	-	-
28-19	B/D/A	10				4	6	80	110	250	280
28-20	A	14				10	4	80	110	250	280
28-21	A	37					37	80	110	250	280
28-22	D	6		3			3	70	145	215	290
28-05	A	5			5			-	-	-	-
28-51	A	12				12		-	-	-	-
32-1	E/D	5	2			3		80	110	250	280
32-5	D	2	2					35	110	250	325
32-6	A	23		2	3	2	16	80	110	250	325
32-7	INST/A	35				7	28	80	125	235	280
32-8	A	30				6	24	80	125	235	280
32-9	D	14		2			12	80	110	250	280
32-15	D	8	2			6		35	110	250	280
32-17	D	4		4				45	110	250	280
32-22	A	54					54	80	110	250	280
32-03	A	3		3				-	-	-	-
32-59	A	42			2		40	-	-	-	-
36-1	D	22				4	18	80	110	250	280
36-3	D	6	3			3		70	145	215	290
36-4	D/A	3	3					70	145	215	290
36-5	A	4	4					-	120	240	-
36-7	A	47				7	40	80	110	250	280
36-8	A	47				1	46	80	110	250	280
36-9	A	31		1	2	14	14	80	125	235	280
36-10	A	48					48	80	125	235	280
36-15	D/A	35					35	60	125	245	305
36-30	A	30				30		-	-	-	-
36-40	A	40				22	18	-	-	-	-
36-52	A	52					52	72	144	216	288
36-02	A	27				27		-	-	-	-
36-03	A	20				20		-	-	-	-
36-04	A	22				22		-	-	-	-

Amphenol MIL-C-5015 Connectors




MS- A,E/F,R Class

Contact Arrangements

Front face of pin insert or rear face of socket insert illustrated

							
		Front of Socket Insert		Front of Socket Insert			
Insert Arrangement	10SL-2	10SL-3	10SL-4	12S-1	12S-3	12S-5	14S-1
Service Rating	A	A	A	A	A	D	A
Number of Contacts	1	3	2	2	2	1	3
Contact Size	16	16	16	16	16	12	16

							
Insert Arrangement	14S-2	14S-5	14S-6	14S-7	14S-9	14S-07	16S-1
Service Rating	Inst.	Inst.	Inst.	A	A	A	A
Number of Contacts	4	5	6	3	2	7	7
Contact Size	16	16	16	16	16	16	16

						
Insert Arrangement	16S-4	16S-5	16S-8	16-9	16-10	16-11
Service Rating	D	A	A	A	A	A
Number of Contacts	2	3	5	2 2	3	2
Contact Size	16	16	16	12 16	12	12



Amphenol MIL-C-5015 Connectors

MS- A,E/F,R Class

Contact Arrangements

Front face of pin insert or rear face of socket insert illustrated

Insert Arrangement	16-12	16-13	18-1	18-3	18-4
Service Rating	A	A	B, C, F, G=A; Bal.=Inst	D	D
Number of Contacts	1	2	10	2	4
Contact Size	4	12	16	12	16

Insert Arrangement	18-5	18-8	18-9	18-10	18-11
Service Rating	D	A	Inst.	A	A
Number of Contacts	2 1	1 7	2 5	4	5
Contact Size	12 16	12 16	12 16	12	12

Insert Arrangement	18-12	18-13	18-15	18-19	18-20
Service Rating	A	A	A	A	A
Number of Contacts	6	1 3	4	10	5
Contact Size	16	8 12	12	16	16



Amphenol MIL-C-5015 Connectors

MS- A,E/F,R Class

Contact Arrangements

Front face of pin insert or rear face of socket insert illustrated

Insert Arrangement	18-21	18-22	18-32	20-2	20-3	20-4
Service Rating	A	D	A	D	D	D
Number of Contacts	3	3	8	1	3	4
Contact Size	12	16	16	0	12	12

Insert Arrangement	20-7	20-8	20-11	20-15	20-16
Service Rating	H, G=D: C, D, E, F=A	Inst.	Inst.	A	A
Number of Contacts	8	2 4	13	7	2 7
Contact Size	16	8 16	16	12	12 16

Insert Arrangement	20-17	20-18	20-19	20-22
Service Rating	A	A	A	A
Number of Contacts	5 1	3 6	3	3 3
Contact Size	12 16	12 16	8	8 16






CONTACT LEGEND






Amphenol MIL-C-5015 Connectors






MS- A,E/F,R Class

Contact Arrangements

Front face of pin insert or rear face of socket insert illustrated

					
Insert Arrangement	20-23	20-27	20-29	20-33	20-01
Service Rating	A	A	A	A	A
Number of Contacts	2	14	17	11	10
Contact Size	8	16	16	16	16

					
Insert Arrangement	22-1	22-2	22-4	22-7	22-8
Service Rating	D	D	A	E	E
Number of Contacts	2	3	2 2	1	2
Contact Size	8	8	8 12	0	12

					
Insert Arrangement	22-9	22-10	22-11	22-12	22-13
Service Rating	E	E	B	D	E=D; A, B, C, D=A
Number of Contacts	3	4	2	2 3	4 1
Contact Size	12	16	16	8 16	12 16











Amphenol MIL-C-5015 Connectors





MS- A,E/F,R Class

Contact Arrangements

Front face of pin insert or rear face of socket insert illustrated

				
Insert Arrangement	22-14	22-15	22-18	22-19
Service Rating	A	D=E; A, B, C, E, F=A	A,B,F,G,H=D; C,D,E=A	A
Number of Contacts	19	5 1	8	14
Contact Size	16	12 16	16	16

				
Insert Arrangement	22-20	22-21	22-22	22-23
Service Rating	A	A	A	H=D; Bal.=A
Number of Contacts	9	1 2	4	8
Contact Size	16	0 16	8	12

				
Insert Arrangement	22-27	22-28	24-2	24-5
Service Rating	J=D; Bal.=A	A	D	A
Number of Contacts	1 8	7	7	16
Contact Size	8 16	12	12	16

CONTACT LEGEND




Amphenol MIL-C-5015 Connectors

MS- A,E/F,R Class


Contact Arrangements

Front face of pin insert or rear face of socket insert illustrated


Insert Arrangement
Service Rating
Number of Contacts
Contact Size




24-6
A, G, H=D; Bal.=A
8
12



24-7
A
2 14
12 16




24-9
A
2
4




24-10
A
7
8


Insert Arrangement
Service Rating
Number of Contacts
Contact Size




24-11
A
3 6
8 12



24-12
A
2 3
4 12




24-20
D
2 9
1 16




24-22
D
4
8


Insert Arrangement
Service Rating
Number of Contacts
Contact Size




24-28
Inst.
24
16



24-02
A
9
12



24-03
A
12
16























28-1
A,J,E=D; Bal.=A
3 6
8 12



Amphenol MIL-C-5015 Connectors MS- A,E/F,R Class Contact Arrangements

Front face of pin insert or rear face of socket insert illustrated

Insert Arrangement Service Rating Number of Contacts Contact Size				
	28-3	28-6	28-7	28-9
	E	D	D	D
	3	3	2	6 6
Insert Arrangement Service Rating Number of Contacts Contact Size				
	28-10	28-11	28-12	28-15
	G=D; Bal. A	A	A	A
	2 2 3	4 18	26	35
Insert Arrangement Service Rating Number of Contacts Contact Size				
	28-16	28-17	28-19	28-20
	A	R=B;M,N,P=D;A to L=A	H,M=B;A,B=D;Bal.=A	A
	20	15	4 6	10 4
Insert Arrangement Service Rating Number of Contacts Contact Size				
	28-16	28-17	28-19	28-20
	A	R=B;M,N,P=D;A to L=A	H,M=B;A,B=D;Bal.=A	A
	20	15	4 6	10 4
Insert Arrangement Service Rating Number of Contacts Contact Size				
	28-16	28-17	28-19	28-20
	A	R=B;M,N,P=D;A to L=A	H,M=B;A,B=D;Bal.=A	A
	20	15	4 6	10 4







CONTACT LEGEND 16 12 8 4 0





Amphenol MIL-C-5015 Connectors




MS- A,E/F,R Class

Contact Arrangements

Front face of pin insert or rear face of socket insert illustrated

				
Insert Arrangement	28-21	28-22	28-51	32-1
Service Rating	A	D	A	A=E; B, C, D, E=D
Number of Contacts	37	3 3	12	2 3
Contact Size	16	4 16	12	0 12

				
Insert Arrangement	32-5	32-6	32-7	32-8
Service Rating	D	A	A, B, h, j=Inst.; Bal.=A	A
Number of Contacts	2	2 3 2 16	7 28	6 24
Contact Size	0	4 8 12 16	12 16	12 16

			
Insert Arrangement	32-9	32-15	32-17
Service Rating	D	D	D
Number of Contacts	2 12	2 6	4
Contact Size	4 16	0 12	4




Amphenol MIL-C-5015 Connectors

MS Series A,E/F,R Class


Contact Arrangements

Front face of pin insert or rear face of socket insert illustrated


Insert Arrangement
Service Rating
Number of Contacts
Contact Size



32-22
A
54
16




32-59
A
2 40
8 16




32-03
A
3
4


Insert Arrangement
Service Rating
Number of Contacts
Contact Size



36-1
D
4 18
12 16




36-3
D
3 3
0 12




36-4
A=D; B, C=A
3
0


Insert Arrangement
Service Rating
Number of Contacts
Contact Size



36-5
A
4
0



36-7
A
7 40
12 16



36-8
A
1 46
12 16



CONTACT LEGEND 16 12 8 4 0


Amphenol MIL-C-5015 Connectors

MS Series A,E/F,R Class

Contact Arrangements

Front face of pin insert or rear face of socket insert illustrated

Insert Arrangement
Service Rating
Number of Contacts
Contact Size




36-9

A

1 2 14 14

4 8 12 16




36-10

A

48

16




36-15

M=D; Bal.=A

35

16

Insert Arrangement
Service Rating
Number of Contacts
Contact Size




36-30

A

30

12




36-40

A

22 18

12 16




36-52

A

52

16

Insert Arrangement
Service Rating
Number of Contacts
Contact Size




36-02

A

27

12




36-03

A

20

12



36-04

A

22

12



CONTACT LEGEND

16

12

8

4

0

Amphenol MIL-C-5015 Connectors MS Series Accessories



Plug Protection Cap




Receptacle Protection Cap



Cable Clamp



Telescoping Bushing



Sealing Gasket

Protection Caps

These metal dust caps are used to protect the plugs and receptacles.

They are furnished with sash chains and are available with bead chains.

MS3057 Cable Clamp

MS3057 style cable clamp was designed for use with jacketed cable or wire protected by tubing. Both clamping halves float maximum strain relief. For unjacketed cable or wires, Use corresponding MS3420 telescoping bushing. Telescoping bushings keep dirt, oil and moisture out of end bell.

Sealing Gasket


Sealing Gasket is being supplied separately

Amphenol MIL-C-5015 Connectors

MS Series

Accessories Dimension

Plug Protection Cap MS25042

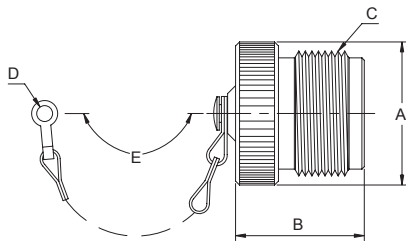


Part Number	Size	Ø A Max	Ø B Max	C Thread 2A	Ø D -0.3	E Approx
MS25042-10D	10S,10SL	18.5	17.2	5/8-24 NEF	4.2	102
MS25042-12D	12S,12	20.4	21.4	3/4-20 NEF	4.2	114
MS25042-14D	14S,14	23.6	21.4	7/8-20 NEF	4.2	114
MS25042-16D	16S,16	26.0	21.4	1-20 NEF	4.2	114
MS25042-18D	18	29.9	21.4	1/8-18 NEF	4.2	114
MS25042-20D	20	33.1	21.4	1/4-18 NEF	4.2*	127
MS25042-22D	22	36.2	21.4	3/8-18 NEF	4.2*	127
MS25042-24D	24	39.4	21.4	1/2-18 NEF	4.2*	140
MS25042-28D	28	45.7	21.4	3/4-18 NS	4.2*	197
MS25042-32D	32	52.0	21.4	2-18 NS	4.2**	197
MS25042-36D	36	59.0	21.4	1/4-16 UN	4.2**	197

These externally threaded metal dust caps are used to protect the MS3106 and MS3108 plugs.

Material is aluminum alloy. They are furnished with sash chains and are available with bead chains.

Optional termination holes are also available. (*5.0) (**5.8)

Receptacle Protection Cap MS25043

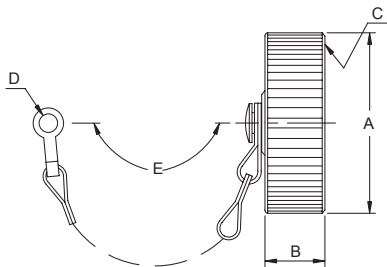

Part Number	Size	Ø A Max	Ø B Max	C Thread 2A	Ø D -0.3	E Approx
MS25043-10D	10S,10SL	20.2	15.8	5/8-24 NEF	4.2	102
MS25043-12D	12S,12	23.4	15.8	3/4-20 NEF	4.2	114
MS25043-14D	14S,14	27.9	15.8	7/8-20 NEF	4.2	114
MS25043-16D	16S,16	29.8	15.8	1-20 NEF	4.2	114
MS25043-18D	18	32.2	15.8	1 1/8-18 NEF	4.2	114
MS25043-20D	20	36.3	15.8	1 1/4-18 NEF	4.2	127
MS25043-22D	22	39.9	15.8	1 3/8-18 NEF	4.2	127
MS25043-24D	24	43.7	15.8	1 1/2-18 NEF	4.2*	140
MS25043-28D	28	50.0	15.8	1 3/4-18 NS	4.2*	197
MS25043-32D	32	56.5	15.8	2-18 NS	4.2**	197
MS25043-36D	36	61.5	15.8	2 1/4-16 UN	4.2**	197

These internally threaded metal dust caps are used to protect MS3100, MS3101 and MS3102 receptacles.

Material is aluminum alloy. They are furnished with sash chains and are available with bead chains.


Optional termination holes are also available. (*4.58) (**5.00)

Amphenol MIL-C-5015 Connectors

MS/DS Series

Accessories Dimension

Cable Clamp MS3057

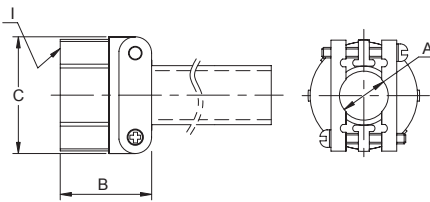


Part Number	Size	Ø A ±0.4	B ±0.8	Ø C ±0.8	I Thread-2B
MS3057-4A	10SL,12S	5.6	20.3	23.3	5/8-24 NEF
MS3057-6A	14S,14	7.9	22.5	25.9	3/4-20 NEF
MS3057-8A	16S,16	11.1	24.4	28.9	7/8-20 NEF
MS3057-10A	18	14.3	23.6	32.2	1-20 NEF
MS3057-12A	20,22	15.9	23.6	37.8	1 3/16-18 NEF
MS3057-16A	24,28	19.1	26.0	43.4	1 7/16-18 NEF
MS3057-20A	32	23.8	27.7	52.1	1 3/4-18 NS
MS3057-24A	36	31.8	29.2	57.3	2-18 NS

MS3057 style cable clamp was designed for use with jacketed cable or wire protected by tubing.

Both clamping halves float maximum strain relief. for unjacketed cable or wires, use corresponding MS3420 telescoping bushing. To order clamp without bushing, add-1 to the P/N.

Telescoping Bushing MS3420

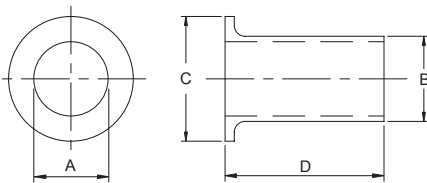

Part Number	Size	Ø A Max	Ø B Max	Ø C	D
MS3420-4	10SL,12S	5.6	7.7	12.8	69.9
MS3420-6	14S,14	7.9	10.9	15.7	66.7
MS3420-8	16S,16	11.1	14.0	18.9	63.5
MS3420-10	18	14.3	15.6	22.6	60.3
MS3420-12	20,22	15.9	18.8	27.5	57.2
MS3420-16	24,28	19.1	23.6	33.4	54.0
MS3420-20	32	23.8	31.5	40.6	50.8
MS3420-24	36	31.8	34.7	46.9	47.6


Telescoping grand bushings (used with 3057 clamp) keep dirt, oil and moisture out of endbell.

Taping or wrapping wires is eliminated since bushing protects wires going thru clamp.

Combinations of bushing may be used to decrease cable entry diameter to improve sealing.

Amphenol MIL-C-5015 Connectors MS-A,E/F,R & B Class Accessories Dimension


Sealing Gasket BMA 31

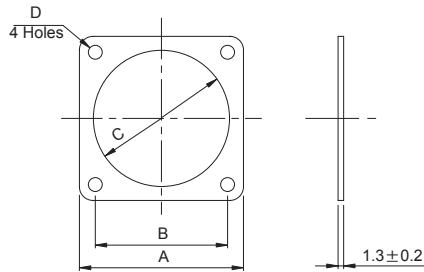

Part Number	Shell Size	□ A	□ B	Ø C	D +0.2
BMA31-10	10S,10SL	25.40	18.26	14.9	3.2
BMA31-12	12S,12	27.79	20.62	16.4	3.2
BMA31-14	14S,14	30.18	23.01	20.4	3.2
BMA31-16	16S,16	32.54	24.61	23.0	3.2
BMA31-18	18	34.94	26.97	25.9	3.2
BMA31-20	20	38.10	29.36	29.1	3.2
BMA31-22	22	41.28	31.75	32.0	3.2
BMA31-24	24	44.45	34.93	35.3	3.8
BMA31-28	28	50.80	39.67	41.5	3.8
BMA31-32	32	57.15	44.45	47.5	4.6
BMA31-36	36	63.50	49.23	54.7	4.6

The flat gasket of synthetic rubber material is provided to take complete advantage of waterproof and pressure sealing features. It is use with the flange mounted receptacle.

Panel Mounting Hole(Reference)



Shell Size	Ø A ± 0.5	□ B ± 0.12	C +0.2
10SL	17.5	18.26	3.2
12S	18.5	20.62	3.2
12	18.5	20.62	3.2
14S	22.0	23.01	3.2
14	22.0	23.01	3.2
16S	25.0	24.61	3.2
16	25.0	24.61	3.2
18	30.0	26.97	3.2
20	33.0	29.36	3.2
22	35.0	31.75	3.2
24	39.0	34.93	3.8
28	45.0	39.67	3.8
32	52.0	44.45	4.6
36	59.0	49.23	4.6

Amphenol MIL-C-5015 Connectors MS Basic Construction

Amphenol MIL-C-5015 connectors meet the latest performance requirements of MIL-C-5015.

These connectors represent well-proven electrical capability at an acceptable cost for most equipment where durability is important. MIL-C-5015 features threaded coupling & single key & keyway polarization representing maximum simplicity in design. Applications include industrial machines, military ground support equipment, ordnance & shipboard installation. Amphenol MIL-C-5015 connectors are available in classes A, B, E/F, R, and also offer a range of pre-earth connectors.

Therefore, you will always find the right connector in Amphenol, with us, for conditions & performance requirements you may have.

1. Characteristics

Insulation resistance.	5,000 Mega ohms minimum(at 25 °C)
Temperature range	-55°C to 125°C
Durability	500 Cycle connection/Disconnection

2. Dielectric with standing voltage

Service rating	Test voltage AC(rms)	Operating voltage	
		AC	DC
Inst	1,000	200	250
A	2,000	500	700
D	2,800	900	1,250
E	3,500	1,250	1,750
B	4,500	1,750	2,450
C	7,000	3,000	4,200

3. Contact engagement and seperation forces

Contact mating end size	Minimum separation force(ounce)	Maximum average engagement force (ounce)	Maximum average engagement force (ounce)
#16	2	24	30
#12	3	24	30
#8	5	-	160
#4	10	-	240
#0	15	-	320

4. Electrical data

Contact size	Pin contact Diam,	Solder Pot Diam,	Rated Current (Mated with insulators)	Contact resistance	
				Test current DC A	Potential Drop(Max) mV
#16	1.6	1.9	13A	13A	49
#12	2.4	3.0	23A	23A	42
#8	3.6	5.4	46A	46A	26
#4	5.7	8.4	80A	80A	23
#0	9.1	12.2	150A	150A	21

5. Wire range accommodations

Size	A.W.G	Wire normal square size(mm²)	Dielectric material outer diam.
#16	#22~#16	≤ 1.3	1.7~3.3
#12	#14~#12	≤ 3.5	2.9~4.3
#8	#10~#8	≤ 8.0	4.2~6.4
#4	#6~#4	≤ 22.0	7.0~9.4
#0	#2~#0	≤ 50.0	10.6~14.0



Amphenol MIL-C-5015 Connectors

MS/DS Series

How to order

MIL-C-5015 (Solder Contacts)

MS 3102 A 18 - 10 P W XXX
1 2 3 4 5 6 7 8

1. Connector Type
 MS - designates Military Standard
 DS - Amphenol MIL- C-5015 Europe use
2. Connector Style
 3100- wall mounting receptacle
 3101- cable connecting plug
 3102- box mounting receptacle
 3106- straight plug
 3108- 90° Right angle plug
3. Service Class
 A - General purpose, Solid Endbell
 E - Environmental resisting, with grommet seal & strain relief back shell
 F - Environmental resisting with grommet seal & strain relief back shell
 3106F and 3108E style include a front 'O' ring seal
 R - Environmental resisting with grommet seal, light weight and shorter
 Overall length 310R style include a front 'O' ring seal
- 4, 5. Shell size and insert arrangement - see tables, page 26.27
6. Contact Types
 P- designates pin contact, (+) Male
 S- designates socket contact, (-) Female
7. Insert Rotation
 No suffix-Normal
 "W", "X", "Y", or "Z" - See page 26.27
8. Plating information
 No suffix - Olive Drab Zinc
 CD - Cadmium
 C1 - Cobalt (Without +6 Cr)
 621 - Black Zinc
 689 - Electro-less Nickel
 426 - Electro-less Nickel & gold flash contacts

MIL-C-5015 (Crimp Contacts)

MS 4102 A 18 - 10 P W XXX
1 2 3 4 5 6 7 8

1. Connector Type
 MS - designates Military Standard
2. Connector Style
 4100 - wall mounting receptacle
 4101 - cable connecting plug
 4102 - box mounting receptacle
 4106 - straight plug
 4108 - 90° Right angle plug
3. Service Class
 A - General purpose, Solid Endbell
 E - Environmental resisting, with grommet seal & strain relief back shell
 F - Environmental resisting with grommet seal & strain relief back shell
 3106F and 3108E style include a front 'O' ring seal
 R - Environmental resisting with grommet seal, light weight and shorter
 Overall length 310R style include a front 'O' ring seal
- 4, 5. Shell size and insert arrangement - see tables, page 26.27
6. Contact Types
 P- designates pin contact, (+) Male
 S- designates socket contact, (-) Female
7. Insert Rotation
 No suffix - Normal
 "W", "X", "Y", or "Z" - See page 26.27
8. Plating information
 No suffix - Olive Drab Zinc
 CD - Cadmium
 C1 - Cobalt (Without +6 Cr)
 621 - Black Zinc
 689 - Electro-less Nickel
 426 - Electro-less Nickel & gold flash contacts



**MS/Standard
B - Class**

Amphenol MIL-C-5015 Connectors MS - B Class



Cable Connecting Receptacle



Box mounting Receptacle



Straight Plug



Right Angle Plug

MS-B class connector is a general duty standard cylindrical connector. It is a widely used for the automotive machine tool & welding industries, as well as numerous other commercial applications, mechanical forces and physical parameters not subject to extreme or rapid environmental changes [UL](#), approved.

Shells:

Shell components are split endbell and fabricated from high aluminum alloy. Electrically zinc plate finish with an olive drab chromate after-treat offers corrosion resistance.

Contacts:

Pins and sockets are machined from copper alloy with silver plated finish. Size 16 incorporate a closed entry design.


Inserts:

Inserts are plastic, offering high dielectric strength, high arc resistance to vibration proprietary design permits pressurization of either pin or socket

Amphenol MIL-C-5015 Connectors

MS3101B

Cable Connecting Receptacle

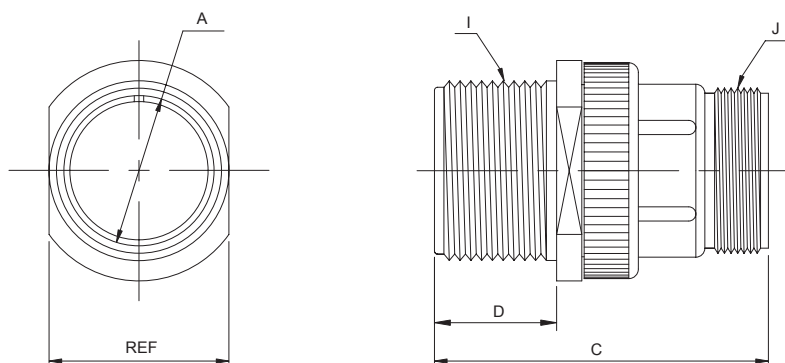

MS3101B split endbell cable connecting receptacles are used for cable extension requirements where mounting provisions are unnecessary.

(mm)


Shell Size	Ø A Max	C Max	D +0.79 -0.00	I Thread-2A (UNEF)	J Thread-2A (UNEF)
10SL	24.61	38.88	14.28	5/8-24 NEF	5/8-24 NEF
12S*	26.97	42.87	14.28	3/4-20 NEF	5/8-24 NEF
12*	26.97	52.37	19.05	3/4-20 NEF	5/8-24 NEF
14S	29.36	42.87	14.28	7/8-20 NEF	3/4-20 NEF
14*	29.36	52.37	19.05	7/8-20 NEF	3/4-20 NEF
16S	31.75	42.87	14.28	1-20 NEF	7/8-20 NEF
16*	31.75	52.37	19.05	1-20 NEF	7/8-20 NEF
18	34.13	52.37	19.05	1 1/8-18 NEF	1-20 NEF
20	37.31	55.57	19.05	1 1/4-18 NEF	1 3/16-18 NEF
22	40.48	55.57	19.05	1 3/8-18 NEF	1 3/16-18 NEF
24	43.66	58.72	20.63	1 1/2-18 NEF	1 7/16-18 NEF
28	50.01	58.72	20.63	1 3/4-18 NS	1 7/16-18 NEF
32	56.36	67.92	22.23	2-18 NS	1 3/4-18 NS
36	62.71	67.92	22.23	2 1/4-16 UN	2-18 NS

* No tooling

Amphenol MIL-C-5015 Connectors

MS3102A-K

Box Mounting Receptacle

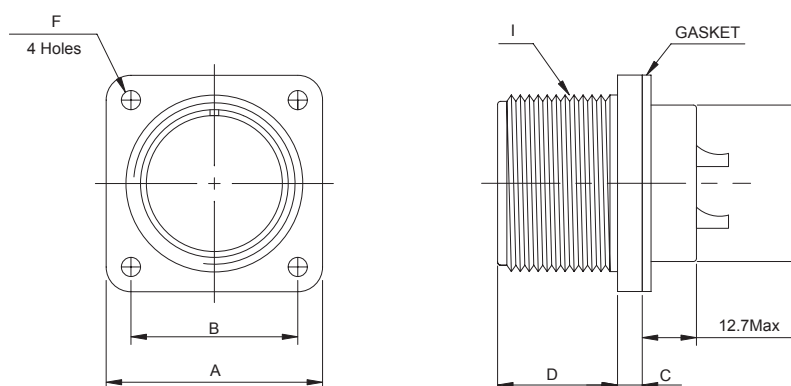

MS3102B box mounting receptacles are used on boxes and equipment cases where no cable support is required.


(mm)

Shell Size	□A ±0.79	□B ±0.12	C ±0.50	D +0.79 -0.00	ØF +0.25 -0.12	ØG Max	I Thread-2A (UNEF)
10SL	25.40	18.26	3.00	14.28	3.05	16.00	5/8-24 NEF
12S	27.80	20.62	3.00	14.28	3.05	16.50	3/4-20 NEF
12	27.80	20.62	3.00	19.05	3.05	16.50	3/4-20 NEF
14S	30.20	23.01	3.00	14.28	3.05	20.00	7/8-20 NEF
14	30.20	23.01	3.00	19.05	3.05	20.00	7/8-20 NEF
16S	32.50	24.61	3.00	14.28	3.05	23.00	1-20 NEF
16	32.50	24.61	3.00	19.05	3.05	23.00	1-20 NEF
18	34.90	26.97	4.00	19.05	3.05	26.00	1 1/8-18 NEF
20	38.10	29.36	4.00	19.05	3.05	29.00	1 1/4-18 NEF
22	41.30	31.75	4.00	19.05	3.05	32.50	1 3/8-18 NEF
24	44.50	34.93	4.00	20.63	3.73	35.50	1 1/2-18 NEF
28	50.80	39.67	4.00	20.63	3.73	42.00	1 3/4-18 NEF
32	57.20	44.45	4.00	22.23	4.39	48.00	2-18 NS
36	63.50	49.23	4.00	22.23	4.39	54.50	2 1/4-16 UN

Amphenol MIL-C-5015 Connectors

MS3106B

Straight Plug

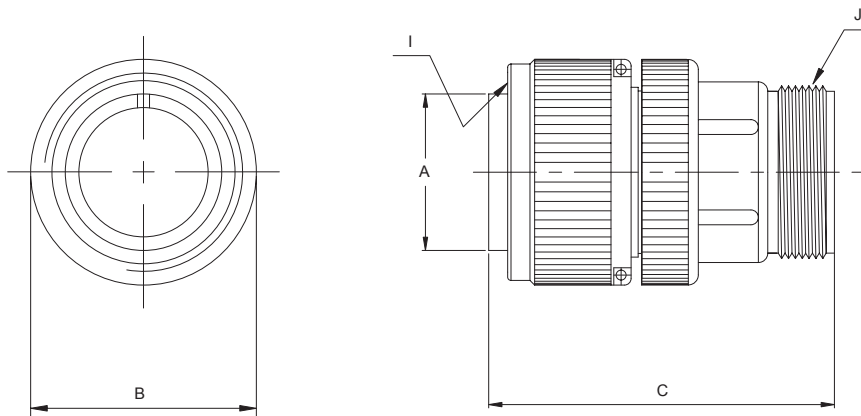

MS3106B straight plugs with split endbell are used with 3100, 3101 and 3102 receptacles.

(mm)


Shell Size	Ø A +0.00 -0.38	Ø B Max	C Max	I Thread-2B (UNEF)	J Thread-2A (UNEF)
10SL	11.33	24.61	38.88	5/8-24 NEF	5/8-24 NEF
12S*	14.1	26.97	42.87	3/4-20 NEF	5/8-24 NEF
12*	14.1	26.97	52.37	3/4-20 NEF	5/8-24 NEF
14S	17.15	29.36	42.87	7/8-20 NEF	3/4-20 NEF
14*	17.15	29.36	52.37	7/8-20 NEF	3/4-20 NEF
16S	20.45	31.75	42.87	1-20 NEF	7/8-20 NEF
16*	20.45	31.75	42.87	1-20 NEF	7/8-20 NEF
18	23.62	34.13	52.37	1 1/8-18 NEF	1-20 NEF
20	26.67	37.31	55.57	1 1/4-18 NEF	1 3/16-18 NEF
22	29.85	40.48	55.57	1 3/8-18 NEF	1 3/16-18 NEF
24	33.02	43.66	58.72	1 1/2-18 NEF	1 7/16-18 NEF
28	39.61	50.01	58.72	1 3/4-18 NS	1 7/16-18 NEF
32	44.96	56.36	61.92	2-18 NS	1 3/4-18 NS
36	50.29	62.71	61.92	2 1/4-16 UN	2-18 NS

* No tooling

Amphenol MIL-C-5015 Connectors

MS3108B

Straight Plug

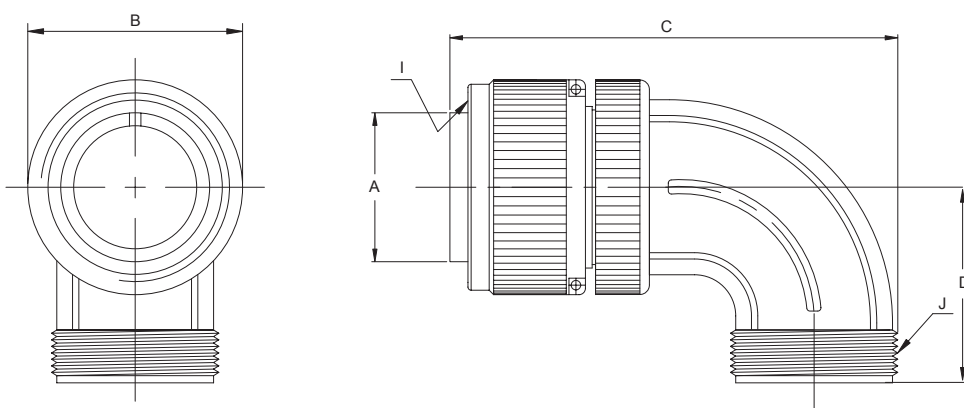


MS3108B Right angle plugs, have a split endbell and are used where wires must be brought at an abrupt angle. Either the split or solid endbells on the 3108 are capable of being rotated and locked. (mm)

Shell Size	Ø A +0.00 -0.38	Ø B Max	C Max	D Max	I Thread-2A (UNEF)	J Thread-2A (UNEF)
10SL	11.33	24.61	46.02	25.4	5/8-24 NEF	5/8-24 NEF
12S*	14.10	26.97	50.80	26.9	3/4-20 NEF	5/8-24 NEF
12*	14.10	26.97	57.15	26.9	3/4-20 NEF	5/8-24 NEF
14S	17.15	29.36	53.97	28.5	7/8-20 NEF	3/4-20 NEF
14*	17.15	29.36	58.72	28.5	7/8-20 NEF	3/4-20 NEF
16S*	20.45	31.75	60.32	30.1	1-20 NEF	7/8-20 NEF
16*	20.45	31.75	65.07	30.1	1-20 NEF	7/8-20 NEF
18	23.62	34.13	68.27	33.3	1 1/8-18 NEF	1-20 NEF
20	26.67	37.31	76.98	34.9	1 1/4-18 NEF	1 3/16-18 NEF
22	29.85	40.48	76.98	34.9	1 3/8-18 NEF	1 3/16-18 NEF
24	33.02	43.66	86.51	39.6	1 1/2-18 NEF	1 7/16-18 NEF
28	38.61	50.01	86.51	39.6	1 3/4-18 NS	1 7/16-18 NEF
32	44.96	56.36	95.25	47.6	2-18 NS	1 3/4-18 NS
36	50.29	62.71	100.02	52.3	2 1/4-16 UN	2-18 NS

* No tooling

Amphenol MIL-C-5015 Connectors MS-B Class

Insert Arrangements & Alternate Positioning

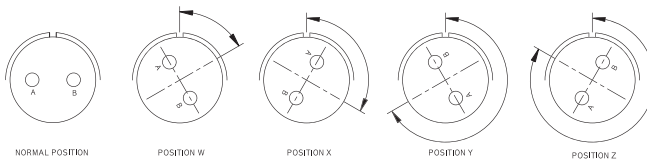

Contact Arrange- ment	Service Rating	Total Contacts	Contact Size					Alternate Position- Degrees			
			0	4	8	12	16	W	X	Y	Z
	A	3					3	-	-	-	-
10SL-3	Inst	4					4	-	120	240	-
14S-2	Inst	6					6	-	-	-	-
14S-6	A	3					3	90	180	270	-
14S-7	A/Inst	10					10	70	145	215	290
18-1	A	8				1	7	70	-	-	290
18-8	A	4				4		-	120	240	-
18-10	A	5				5		-	170	265	
18-11	D	4				4		45	110	250	-
20-4	A	7				7		80	-	-	280
20-15	A	9				2	7	80	110	250	280
20-16	A	9				3	6	35	110	250	325
20-18	A	14					14	35	110	250	325
20-27	A	17					17	80	-	-	20
20-29	A	19					19	80	110	250	280
22-14	A	4			4			-	110	250	-
22-22	D/A	8				8		35	-	250	-
22-23	A	7			7			80	-	-	280
24-10	A	9			3	6		35	110	250	325
24-11	Inst	24					24	80	110	250	280
24-28	A	22				4	18	80	110	250	280
28-11	A	26					26	90	180	270	-
28-12	A	35					35	80	110	250	280
28-15	A	20					20	80	110	250	280
28-16	A	14			10	4		80	110	250	280
28-20	A	37					37	80	110	250	280
28-21	A	23		2	3	2	16	80	110	250	325
32-6	Inst/A	35				7	28	80	125	235	280
32-7	A	30				6	24	80	125	235	280
32-8	A/U/V	54					54	80	110	250	280
32-22	A	48					48	80	125	235	280
36-10	A	40				22	18	-	-	-	-
36-40	A	73					73	-	-	-	-

36-73

Amphenol MIL-C-5015 Connectors

MS-B Class

Contact Arrangements

Insert Arrangement	Front of Socket Insert	14S-2	14S-6	14S-7	18-1	18-8
Service Rating	10SL-3	Inst.	Inst.	A	B, C, F, G=A; Bal.=Inst	A
Number of Contacts	3	4	6	3	10	1 7
Contact Size	A	16	16	16	16	12 16

Insert Arrangement	18-10	18-11	20-4	20-15	20-16
Service Rating	A	A	D	A	A
Number of Contacts	4	5	4	7	2 7
Contact Size	12	12	12	12	12 16


Insert Arrangement	20-18	20-27	20-29	22-14
Service Rating	A	A	A	A
Number of Contacts	3 6	14	17	19
Contact Size	12 16	16	16	16



Amphenol MIL-C-5015 Connectors

MS-B Class


Contact Arrangements



22-22


Insert Arrangement
Service Rating
Number of Contacts
Contact Size

A
4
8




22-23

H=D; Bal.=A
4
8




24-10

A
7
8



24-11


A
3 6
8 16



24-28


Insert Arrangement
Service Rating
Number of Contacts
Contact Size

Inst.
24
16




28-11

A
4 18
12 16




28-12

A
26
16



28-15


A
35
16



28-16


Insert Arrangement
Service Rating
Number of Contacts
Contact Size

A
20
16



28-20

A
10 4
12 16



28-21

A
37
16



CONTACT LEGEND

16 12 8 4 0

Amphenol®

Amphenol MIL-C-5015 Connectors

MS-B Class


Contact Arrangements

Insert Arrangement

Service Rating

Number of Contacts

Contact Size




32-6

A

2 3 2 16

4 8 12 16




32-7

A, B, h, j=Insert.; Bal.=A

7 28

12 16



32-8

A

6 24


12 16

Insert Arrangement

Service Rating

Number of Contacts

Contact Size




32-22

A

54

16




36-10

A

48

16




36-40

A

22 18

12 16



Insert Arrangement

Service Rating

Number of Contacts


Contact Size

36-73

A

73

16





Amphenol MIL-C-5015 Connectors

MS-B Class

How to order

MIL-C-5015 (Solder Contacts)

<u>MS</u>	<u>3106B</u>	<u>18 - 10</u>	<u>S</u>	<u>W</u>	<u>XXX</u>
<u>1</u>	<u>2</u>	<u>3 4</u>	<u>5</u>	<u>6</u>	<u>7</u>

1. Connector Type
MS - designates Military Standard
2. Connector Style
3101B - cable connecting plug with split endbell
3102A-K - box mounting receptacle(with plastic insulator)
3106B - straight plug with split endbell
3108B - 90° Right angle plug with split endbell
- 3, 4. Shell size and insert arrangement - see tables, page 51
5. Contact Types
P - designates pin contact, (+) Male
S - designates socket contact, (-) Female
6. Insert Rotation
No suffix - Normal
"W", "X", "Y", or "Z" - See page 51
7. Plating information
No suffix - Olive Drab Zinc
C1 - Cobalt (Without +6 Cr)
621 - Black Zinc
689 - Electro-less Nickel



**MS/Standard
DL-Class
Pre-Earth type**

Amphenol MIL-C-5015 Connectors

DL Series

Pre-earth type



Box mounting Receptacle



Straight Plug



Right Angle Plug

DL Series are highly reliable circular connectors (wire soldering type) approved by **TÜV** satisfying European safety standards and **UL** standards.

They feature IP67 class water and dust proof, when mated and a protective earth circuit with first mate break grounding contacts.

They are ideal for use in machine tools, robots, and other industrial machines. Compatible with MS connector.

Shells:

Shell components are fabricated from high grade aluminum alloy. Electrically zinc plate finish with an black chromate after treatment offers corrosion resistance.

Consult Amphenol Daeshin for other plating options.

Contacts:

Pins and sockets are machined from copper alloy with silver plated finish. Size 16 and 12 socket incorporate a closed entry design.

Insulators:


Front inserts are Silicone rubber and Rear inserts are PPS resin for box mount receptacle only.

and also straight & right angle plug's insert is PPS resin.

Amphenol MIL-C-5015 Connectors

DL3102A

Box mounting receptacle

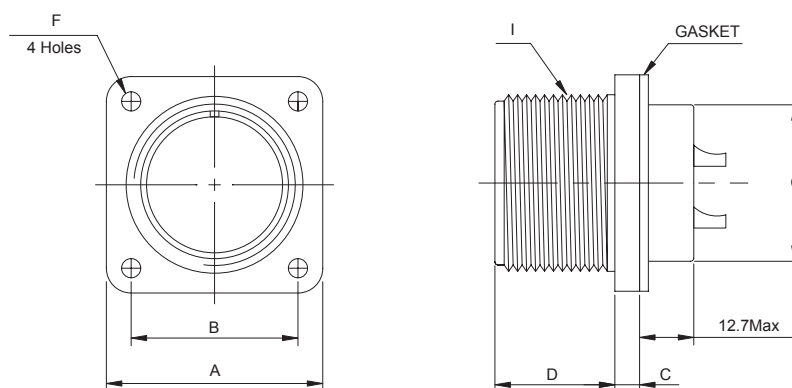

DL3102A box mounting receptacles are used on boxes and equipment cases where no cable support is required.

(mm)


Shell Size	□ A ±0.79	□ B ±0.12	C ±0.3	D +0.79 -0.00	E ±0.2	Ø F +0.25 -0.12	Ø G Max	I Thread-2A (UNEF)
10SL	25.40	18.26	2.1	14.28	23.5	3.05	16	5/8-24 NEF
18	34.93	26.97	2.7	19.05	28.0	3.05	25	1 1/8-18 NEF
20	38.10	29.36	2.7	19.05	30.0	3.05	30	1 1/4-18 NEF
22	41.28	31.75	2.7	19.05	30.8	3.05	33	1 3/8-18 NEF
24	44.45	34.93	2.7	20.63	32.4	3.73	36	1 1/2-18 NEF
24-10(G)*	44.45	34.93	2.7	20.63	32.4	3.73	36	1 1/2-18 NEF
32	57.05	44.45	3.9	22.5	33.9	4.4	48	2-18 NS

* Attention: No grounding pin in DL3102A24-10P(G)

Amphenol MIL-C-5015 Connectors

DL3106A

Straight Plug

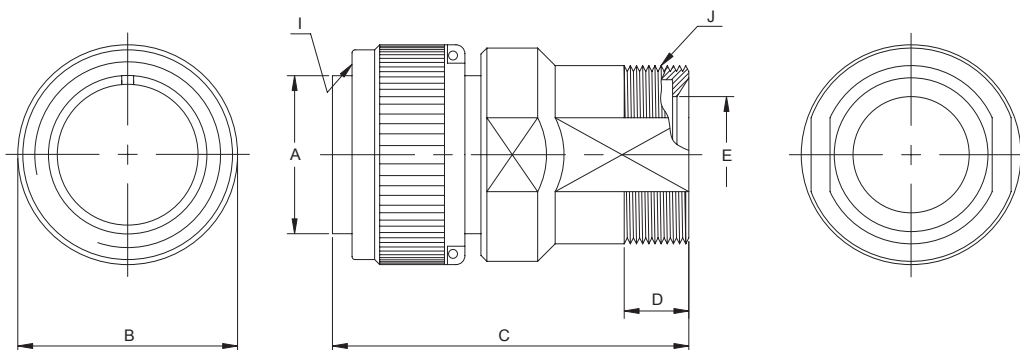

DL3106A straight plugs are used with 3102 receptacles.

(mm)


Shell Size	Ø A +0.00 -0.38	Ø B Max	C Max	D Min	E Max	I Thread-2B (UNEF)	J Thread-2A (UNEF)
10SL	11.33	24.61	44.2	10.0	6.8	5/8-24 NEF	5/8-24 NEF
18	23.62	34.13	58.3	11.5	15.0	1 1/8-18 NEF	1-20 NEF
20	26.27	37.31	60.0	11.0	17.0	1 1/4-18 NEF	1 3/16-18 NEF
22	29.85	40.48	67.6	11.0	17.0	1 1/4-18 NEF	1 3/16-18 NEF
24	33.02	43.66	71.8	11.5	19.8	1 1/2-18 NEF	1 7/16-18 NEF
24-10(G)*	33.02	43.66	71.8	11.5	19.8	1 1/2-18 NEF	1 7/16-18 NEF
32	44.9	57.00	73.0	10.5	27.0	2-18 NS	1 3/4-18 NS

* Attention: No grounding pin in DL3102A24-10P(G)

Amphenol MIL-C-5015 Connectors

DL3108A

Right Angle Plug

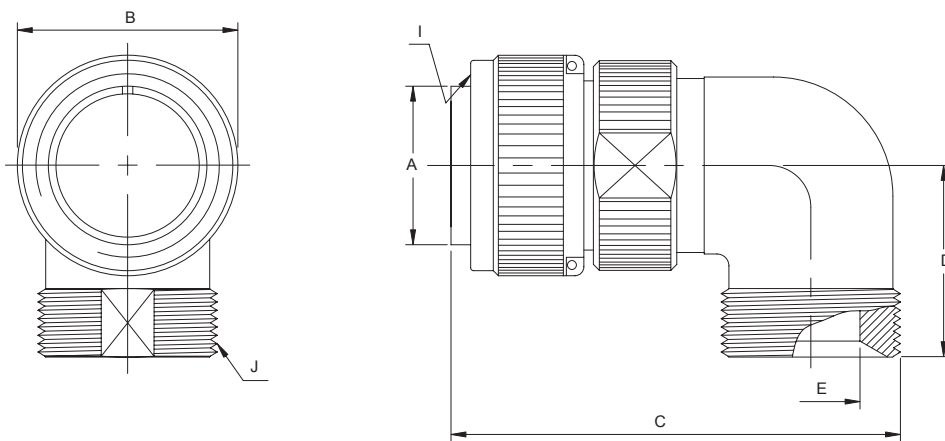

DL3108A Right angle plugs have a solid endbell and are used where wire must be brought at an abrupt angle.

(mm)

Shell Size	Ø A +0.00 -0.38	Ø B Max	C Max	D Max	E Max	I Thread-2B (UNEF)	J Thread-2A (UNEF)
10SL	11.33	24.61	44.0	24.0	6.8	5/8-24 NEF	5/8-24 NEF
18	23.62	34.13	65.0	30.01	5.0	1 1/8-18 NEF	1-20 NEF
20	26.27	37.31	74.2	32.01	7.0	1 1/4-18 NEF	1 3/16-18 NEF
22	29.85	40.48	73.0	32.01	7.0	1 3/8-18 NEF	1 3/16-18 NEF
24	33.02	43.66	82.0	38.21	9.8	1 1/2-18 NEF	1 7/16-18 NEF
24-10(G)*	33.02	43.66	82.0	38.21	9.8	1 1/2-18 NEF	1 7/16-18 NEF
32	44.9	57.00	91.0	44.5	27.0	2-18 NS	1 3/4-18 NS

* Attention: No grounding pin in DL3102A24-10P(G)

Amphenol®

Amphenol MIL-C-5015 Connectors

DL Series

Insert Arrangements

Contact Arrangement	Service Rating	Total Contacts	Contact Size					Alternate Position-Degrees			
			0	4	8	12	16	W	X	Y	Z
10SL-3	A	3					3	-	-	-	-
18-10	A	4				4		-	120	240	-
18-12	A	6					6	80	-	-	280
20-15	A	7				7		80	-	-	280
22-22	A	4			4			-	110	250	-
24-10	A	7			7			80	-	-	280
32-17	D	4		4				45	110	250	280

Contact Arrangement

Front of Socket Insert

10SL-3

A

3

16

18-10

A

4

12

18-12

A

6

16

20-15

A

7

12

22-22

A

4

8

24-10

A

7

8

32-17

D

4

4

CONTACT LEGEND

16

12

8

4

0


4/0

Amphenol MIL-C-5015 Connectors

DL Series


Accessories Dimension

Cable Clamp DL3057

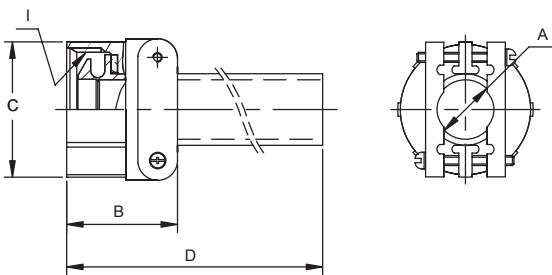(mm)						
	Part Number	Size	Ø A	B	Ø C	D
	I	Thread-2B				
	DL3057-4A	10SL	6.0	20.3	23.3	53.3
	DL3057-10A	18	14.0	23.6	32.2	54.4
	DL3057-12A	20,22	15.9	23.6	37.8	57.3
	DL3057-16A	24	18.0	26.0	43.4	56.4

DL3057 style cable clamp was designed for use with jacketed cable or wire protected by tubing.
Both clamping halves float maximum strain relief.
for unjacketed cable or wires, use corresponding DL3420 telescoping bushing.
To order clamp without busing, add -1 to the P/N.

Telescoping Bushing DL3420

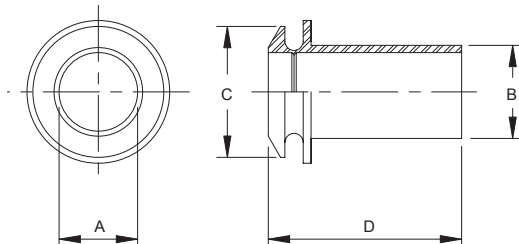(mm)					
	Part Number	Size	Ø A Max	Ø B Max	Ø C
	D				
	DL3420-4	10SL	6.0	7.7	12.0
	DL3420-10	18	14.0	15.6	20.7
	DL3420-12	20,22	15.9	18.8	24.5
	DL3420-16	24	18.0	23.6	30.0

Telescoping grand bushings (used with 3057 clamp) keep dirt, oil and moisture out of endbell.
Taping or wrapping wires is eliminated since bushing protects wires going thru clamp.
Combinations of bushing may be used to decrease cable entry diameter to improve sealing.

Characteristics & Electrical data

(mm)					
Current Rating	Contact Size	#16	#12	#8	#4
	Max.value	13A	23A	46A	80A
Wire Range	A.W.G	#20 ~ #16	#14 ~ #12	#10 ~ #8	#6 ~ #4
Voltage Rating	AC(r.m.s)	200V	250V	250V	250V
	DC	350V	500V	500V	500V
Operating Temperature	-40°C to +125°C				



Amphenol MIL-C-5015 Connectors

DL-Series, Pre-Earth type

How to order

MIL-C-5015 (Solder Contacts)

<u>DL</u>	<u>3102A</u>	<u>32 – 17</u>	<u>P</u>	<u>XXX</u>	
1	2	3	4	5	6

1. Connector Type
DL - designates
2. Connector Style
3102A - box mounting receptacle
3106A - straight plug
3108A - 90° Right angle plug
- 3, 4. Shell size and insert arrangement - see tables, pages 62
5. Contact Types
P - designates pin contact, (+) Male
S - designates socket contact, (-) Female
6. Plating information
No suffix - Olive Drab Zinc
C1 - Cobalt (Without +6 Cr)
621 - Black Zinc
689 - Electro-less Nickel



**Bayonet Coupling -
Connector
ADG, ADGC Series**

Amphenol MIL-C-5015 Connectors ADG, ADGC Series



ADG Bayonet coupling connectors in accordance with VG95234, well known as Amphenol ADG bayonet connectors, are basically MIL-C-5015 type connectors.

They withstand exposure to moisture, oil and vibration.

Bayonet lock coupling.

ADG series connectors meet the performance most subway coupler applications.

Shells:

- Five shell styles
- Fourteen shell sizes
- Solder or crimp contacts, sizes 16-0 accepting 22-0 AWG.
- Five class designations
- Alternate insert positioning

Contacts:

- Pins and sockets are machined from copper alloy with silver plated finish.
- Size 16 and socket contacts incorporate a closed entry design.


Insulators:

- Inserts are resilient synthetic rubber for ADG series, and chloroprene rubber for ADGC series offering high dielectric strength, high arc resistance arc to vibration.
- Proprietary design permits pressurization of pin or socket insert..


Amphenol Bayonet Coupling Connectors

ADG00A, ADGC00A

Wall mounting receptacle

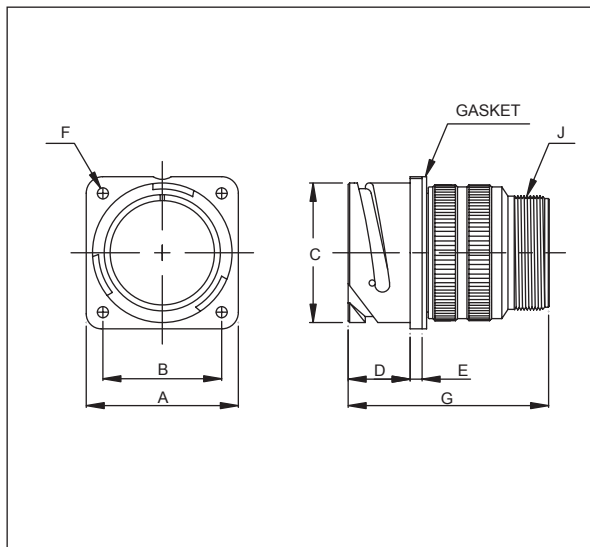

under 36 size shell only

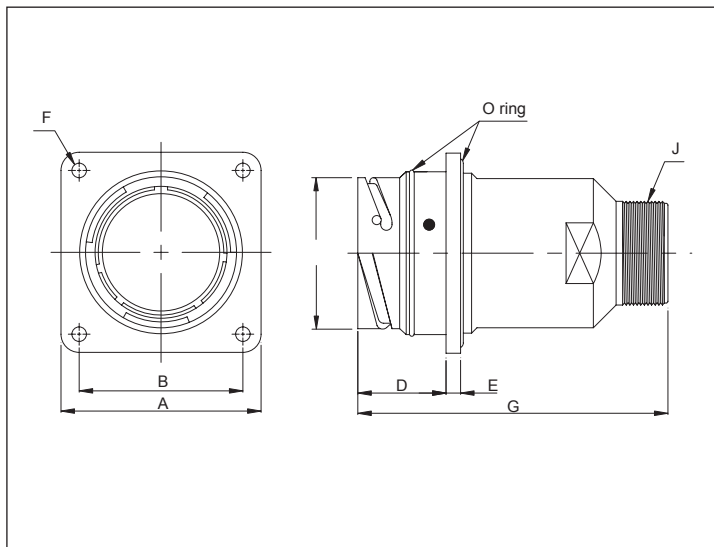

over 48 size shell only

(mm)


Shell Size	□A ±0.79	□B ±0.79	C ±0.3	D +0.79 -0.00	E ±0.5	F +0.25 -0.12	G Max	J (UNEF)
10SL	25.40	18.26	18.2	14.28	2.8	3.2	40.5	5/8-24 NEF
14S	30.18	23.01	24.6	14.28	3.2	3.2	43.5	3/4-20 NEF
16S	32.54	24.61	27.4	14.28	3.2	3.2	40.5	7/8-20 NEF
16	32.54	24.61	27.4	19.05	3.2	3.2	54.0	7/8-20 NEF
18	34.93	26.97	30.8	19.05	4.0	3.2	54.0	1-20 NEF
20	38.10	29.36	34.2	19.05	4.0	3.2	56.0	1 3/16-18NEF
22	41.28	31.75	37.4	19.05	4.0	3.2	56.0	1 3/16-18NEF
24	44.45	34.93	40.9	20.63	4.0	3.7	60.0	1 7/16-18 NEF
28	50.80	39.67	46.7	20.63	4.0	3.7	60.0	1 7/16-18 NEF
32	57.15	44.45	53.4	22.23	4.0	4.3	70.0	1 7/16-18 NEF
36	63.50	49.23	59.6	22.23	4.0	4.3	70.0	2-18 NS
48	110.00	90.00	83.0	48.50	8.0	8.5	170.0	2 1/4-16 UN

All dimensions for reference only


Amphenol MIL-C-5015 Connectors

ADG01A, ADGC01A

Inline receptacle

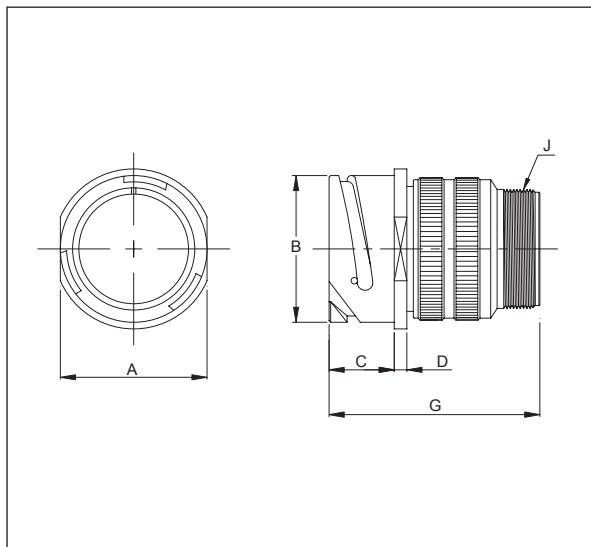

under 36 size shell only

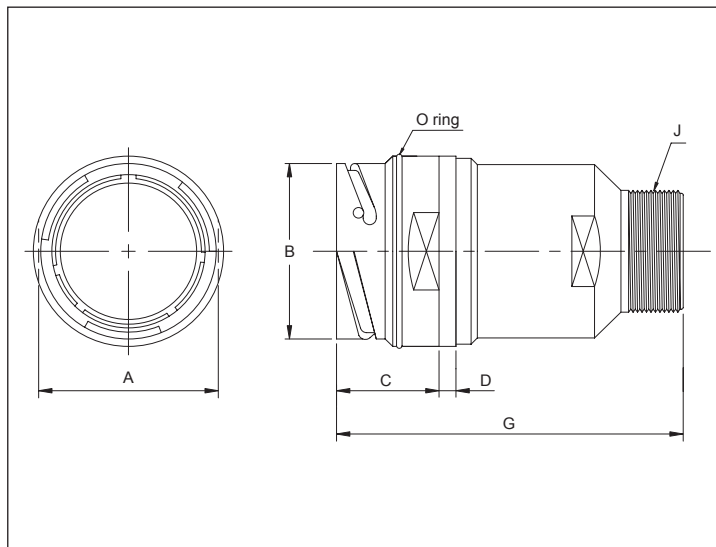

over 48 size shell only

(mm)


Shell Size	A Max	B ± 0.3	C $+0.79$ -0.00	D ± 0.5	G Max	J (UNEF)
10SL	23.00	18.2	14.28	2.8	40.5	5/8-24 NEF
14S	29.00	24.6	14.28	3.2	43.5	3/4-20 NEF
16S	29.00	27.4	14.28	3.2	40.5	7/8-20 NEF
16	33.00	27.4	19.05	3.2	54.0	7/8-20 NEF
18	34.93	30.8	19.05	4.0	54.0	1-20 NEF
20	38.10	34.2	19.05	4.0	56.0	1 3/16-18NEF
22	41.28	37.4	19.05	4.0	56.0	1 3/16-18NEF
24	44.45	40.9	20.63	4.0	60.0	1 7/16-18 NEF
28	50.80	46.7	20.63	4.0	60.0	1 7/16-18 NEF
32	57.15	53.4	22.23	4.0	70.0	1 7/16-18 NEF
36	63.50	59.6	22.23	4.0	70.0	2-18 NS
48	85.00	83.0	48.50	8.0	170.0	2 1/4-16UN

All dimensions for reference only


Amphenol Bayonet Coupling Connectors

ADG02A, ADGC02A

Box mounting receptacle

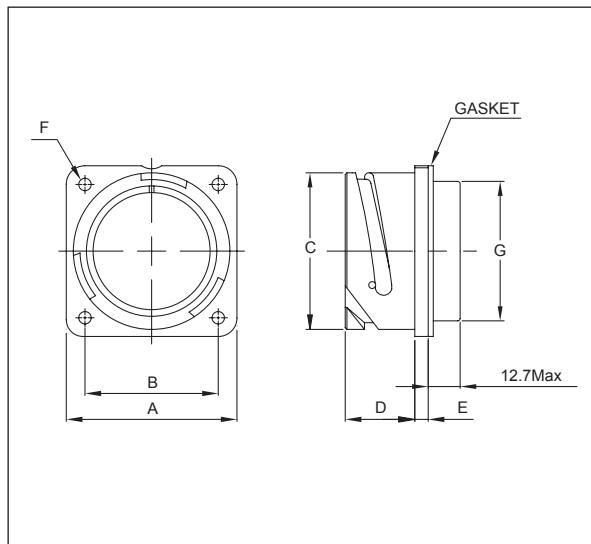

under 36 size shell only

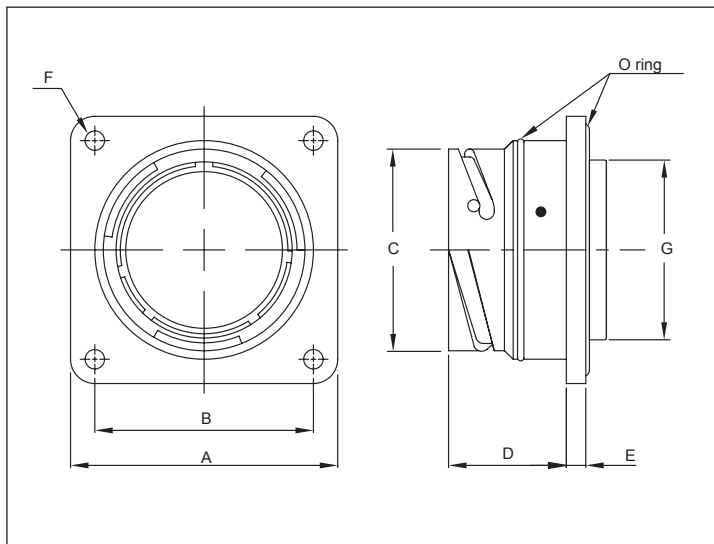

over 48 size shell only

(mm)

Shell Size	$\square A$ ± 0.79	$\square B$ ± 0.79	C ± 0.3	D $+0.79$ -0.00	E ± 0.5	F $+0.25$ -0.12	G Max
10SL	25.40	18.26	18.2	14.28	2.8	3.20	16.2
14S	30.18	23.01	24.6	14.28	3.2	3.20	19.2
16S	32.54	24.61	27.4	14.28	3.2	3.20	22.4
16	32.54	24.61	27.4	19.05	3.2	3.20	22.4
18	34.93	26.97	30.8	19.05	4.0	3.20	25.6
20	38.10	29.36	34.2	19.05	4.0	3.20	29
22	41.28	31.75	37.4	19.05	4.0	3.20	32.2
24	44.45	34.93	40.9	20.63	4.0	3.70	35.3
28	50.80	36.67	46.7	20.63	4.0	3.70	41.4
32	57.15	44.45	53.4	22.23	4.0	4.30	47.8
36	63.50	49.23	59.6	22.23	4.0	4.30	54.1
48	110.00	90.00	83.0	48.50	8.0	8.50	74.0
70	190.00	160.00	145.5	70.00	8.0	11.00	136.5


All dimensions for reference only

Amphenol®

Amphenol Bayonet Coupling Connectors

ADG06A, ADGC06A

Straight Plug

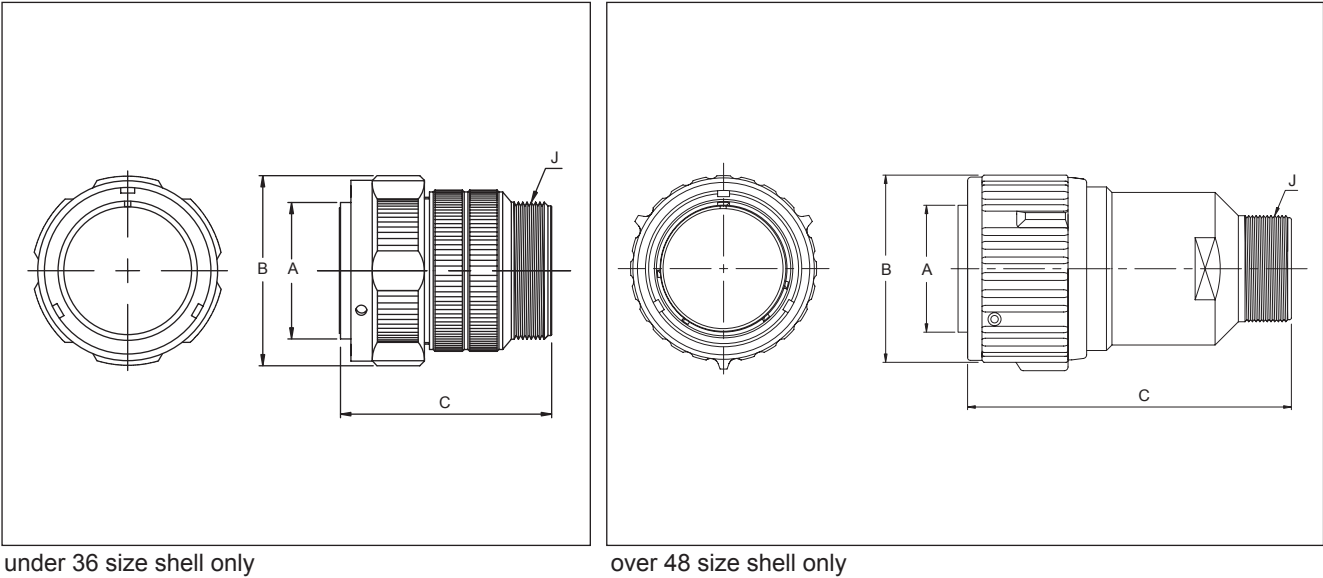

(mm)


Shell Size	A +0.00 -0.38	B Max	C Max	J (UNEF)
10SL	11.33	28.0	40.0	5/8-24 NEF
14S	17.15	35.0	44.0	3/4-20 UNEF
16S	20.45	38.0	40.0	7/8-20 UNEF
16	20.45	38.0	52.5	7/8-20 UNEF
18	23.62	43.0	52.5	1-20 UNEF
20	26.67	46.0	54.0	1 3/16-18 UNEF
22	29.85	49.0	54.0	1 3/16-18 UNEF
24	33.02	52.0	58.0	1 7/16-18 UNEF
28	38.61	58.5	58.0	1 7/16-18 UNEF
32	44.96	65.0	69.0	1 3/4-18 UNS
36	50.29	72.0	69.0	2-18 UNS
48	68.30	101.0	177.0	2 1/4-16 UN

All dimensions for reference only


Amphenol Bayonet Coupling Connectors

ADG08A, ADGC08A

45° Angle plug

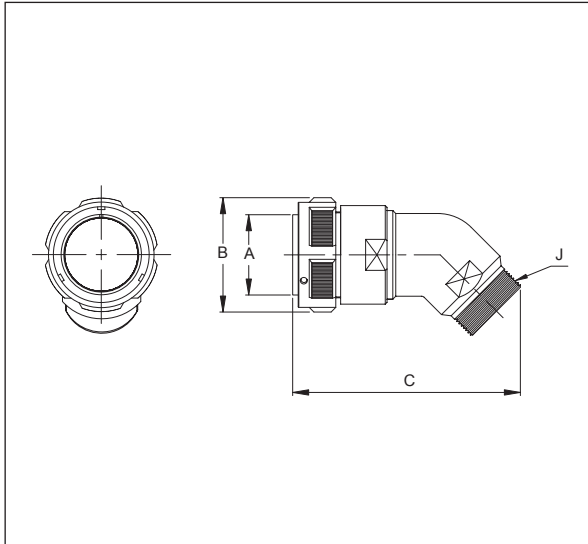

under 36 size shell only

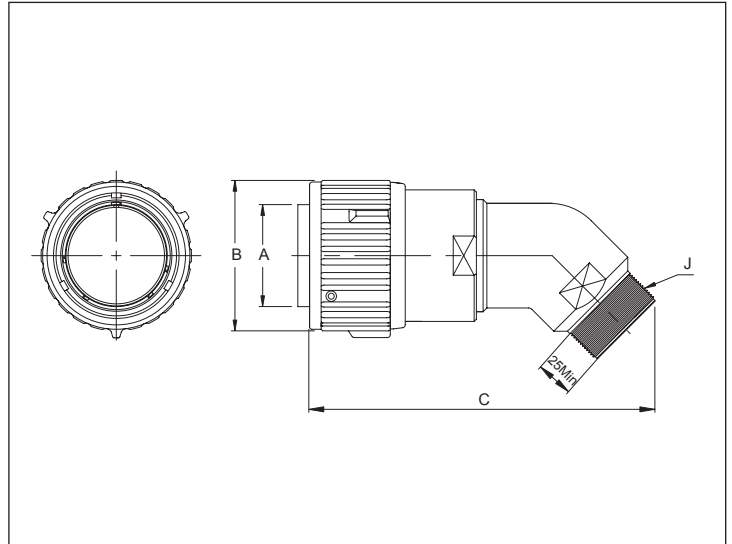

over 48 size shell only

(mm)


Shell Size	A +0.00 -0.38	B Max	C Max	J (UNEF)
36	50.3	72.0	136.0	2-18 UN
48	68.3	101.0	232.0	2 1/4-16 UN
70	126.3	161.0	233.0	2 1/4-16 UN

All dimensions for reference only

Amphenol Bayonet Coupling Connectors

ADG, ADGC Series

Insert Arrangements & Alternate Positioning

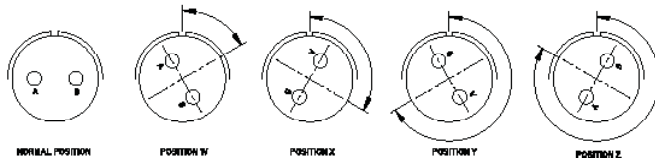


Contact Arrangement	Service Rating	Total Contacts	Contact Size					Alternate Position-Degrees			
			0	4	8	12	16	W	X	Y	Z
10SL-2	A	1					1	-	-	-	-
10SL-3	A	3					3	-	-	-	-
10SL-4	A	2					2	63	-	-	-
14S-2	Inst	4					4	-	120	240	-
14S-5	Inst	5					5	-	110	-	-
14S-6	Inst	6					6	-	-	-	-
14S-7	A	3					3	90	180	270	-
14S-9	A	2					2	70	145	215	290
14S-07	A	7					7	-	-	-	-
16S-1	A	7					7	80	-	-	280
16S-4	D	2					2	35	110	250	325
16S-5	A	3					3	70	145	215	290
16S-8	A	5					5	-	170	265	-
16-9	A	4				2	2	35	110	250	325
16-10	A	3				3		90	180	270	-
16-11	A	2				2		35	110	250	325
16-12	A	1		1				-	-	-	-
16-13	A	2				2		35	110	250	325
18-1	A/Inst	10					10	70	145	215	290
18-3	D	2				2		35	110	250	325
18-4	D	4					4	35	110	250	325
18-5	D	3				2	1	80	110	250	280
18-8	A	8				1	7	70	-	-	290
18-9	Inst.	7				2	5	80	110	250	280
18-10	A	4				4		-	120	240	-
18-11	A	5				5		-	170	265	
18-12	A	6					6	80	-	-	280
18-13	A	4			1	3		80	110	250	280
18-15	A	4				4		-	120	240	-
18-19	A	10					10	-	120	240	-
18-20	A	5					5	90	180	270	-
18-21	A	3				3		-	-	-	

Contact Arrangement	Service Rating	Total Contacts	Contact Size					Alternate Position-Degrees			
			0	4	8	12	16	W	X	Y	Z
18-22	D	3					3	70	145	215	290
18-32	A	8					8	-	-	-	-
20-2	D	1	1					-	-	-	-
20-3	D	3				3		40	145	215	290
20-4	D	4				4		45	110	250	-
20-7	D/A	8					8	80	110	250	280
20-8	Inst.	6			2		4	80	110	250	280
20-11	Inst.	13					13	-	-	-	-
20-15	A	7				7		80	-	-	280
20-16	A	9				2	7	80	110	250	280
20-17	A	6				5	1	90	180	270	-
20-18	A	9				3	6	35	110	250	325
20-19	A	3			3			90	180	270	-
20-22	A	6			3		3	80	110	250	280
20-23	A	2			2			35	110	250	325
20-27	A	14					14	35	110	250	325
20-29	A	17					17	80	-	-	20
20-33	A	11					11	-	-	-	-
20-01	A	10					10	-	-	-	-
22-1	D	2			2			35	110	250	325
22-2	D	3			3			70	145	215	290
22-4	A	4			2	2		35	110	250	325
22-7	E	1	1					-	-	-	-
22-8	E	2				2		35	110	250	325
22-9	E	3				3		70	145	215	290
22-10	E	4					4	35	110	250	325
22-11	B	2					2	35	110	250	325
22-12	D	5			2		3	80	110	250	280
22-13	D/A	5				4	1	34	110	250	325
22-14	A	19					19	80	110	250	280
22-15	E/A	6				5	1	80	110	250	280
22-18	A/D	8					8	80	110	250	280

Amphenol Bayonet Coupling Connectors

ADG, ADGC Series

Insert Arrangements & Alternate Positioning

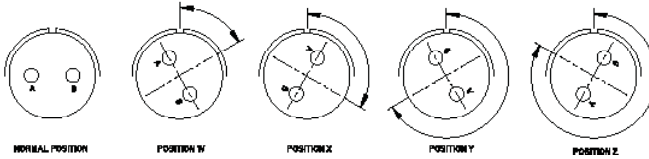

Contact Arrange-ment	Service Rating	Total Contacts	Contact Size					Alternate Position-Degrees				
			0	4	8	12	16	W	X	Y	Z	
22-19	A	14					14	80	110	250	280	
22-20	A	9					9	35	110	250	325	
22-21	A	3	1				2	-	-	-	-	
22-22	A	4			4			-	110	250	-	
22-23	D/A	8				8		35	-	250	-	
22-27	D/A	9			1		8	80	-	250	280	
22-28	A	7				7		80	-	-	280	
24-2	D	7				7		80	-	-	28	
24-5	A	16					16	80	110	250	280	
24-6	D/A	8				8		80	110	250	280	
24-7	A	16				2	14	80	110	250	280	
24-9	A	2		2				35	110	250	325	
24-10	A	7			7			80	-	-	280	
24-11	A	9			3	6		35	110	250	32	
24-12	A	5		2		3		80	110	250	280	
24-20	D	11				2	9	80	110	250	280	
24-22	D	4			4			45	110	250	-	
24-28	Inst	24					24	80	110	250	280	
24-02	A	9				9		-	-	-	-	
24-03	A	12					12	-	-	-	-	
28-1	D/A	9			3	6		80	110	250	280	
28-3	E	3			3			70	145	215	290	
28-6	D	3		3				70	145	215	290	
28-7	D	2		2				35	110	250	325	
28-9	D	12				6	6	80	110	250	280	
28-10	D/A	7		2	2	3		80	110	250	280	
28-11	A	22				4	18	80	110	250	280	
28-12	A	26					26	90	180	270	-	
28-15	A	35					35	80	110	250	280	
28-16	A	20					20	80	110	250	280	
28-17	B/D/A	15					15	-	-	-	-	
28-18	A	12					12	-	-	-	-	

Contact Arrange-ment	Service Rating	Total Contacts	Contact Size					Alternate Position-Degrees				
			0	4	8	12	16	W	X	Y	Z	
28-19	B/D/A	10				4	6	80	110	250	280	
28-20	A	14				10	4	80	110	250	280	
28-21	A	37					37	80	110	250	280	
28-22	D	6		3			3	70	145	215	290	
28-05	A	5			5			-	-	-	-	
28-51	A	12				12		-	-	-	-	
32-1	E/D	5	2			3		80	110	250	280	
32-5	D	2	2					35	110	250	325	
32-6	A	23		2	3	2	16	80	110	250	325	
32-7	INST/A	35				7	28	80	125	235	280	
32-8	A	30				6	24	80	125	235	280	
32-9	D	14		2			12	80	110	250	280	
32-15	D	8	2			6		35	110	250	280	
32-17	D	4		4				45	110	250	280	
32-22	A/U/V	54					54	80	110	250	280	
32-03	A	3		3				-	-	-	-	
32-59	A	42			2		40	-	-	-	-	
36-1	D	22				4	18	80	110	250	280	
36-3	D	6	3			3		70	145	215	290	
36-4	D/A	3	3					70	145	215	290	
36-5	A	4	4					-	120	240	-	
36-7	A	47				7	40	80	110	250	280	
36-8	A	47				1	46	80	110	250	280	
36-9	A	31		1	2	14	14	80	125	235	280	
36-10	A	48					48	80	125	235	280	
36-15	D/A	35					35	60	125	245	305	
36-30	A	30				30		-	-	-	-	
36-40	A	40				22	18	-	-	-	-	
36-52	A	52					52	72	144	216	288	
36-02	A	27				27		-	-	-	-	
36-03	A	20				20		-	-	-	-	
36-04	A	22				22		-	-	-	-	



Amphenol Bayonet Coupling Connectors

ADG, ADGC Series

Special insert Arrangements for transfer of High Power & Signal




Contact Arrangement	Service Rating	Total Contacts	Contact Size						Alternate Position Degrees			
			4/0	0	4	8	12	16	W	X	Y	Z
48-03	B	3	3						30	-	-	-
48-04	D	4	4						30	-	-	-
48-06	D	6	4				2		30	-	-	-
48-06A	D	6		5	1				30	-	-	-
48-06B	B	6	3				3		30	-	-	
48-66	A	66					66		80	110	-	-
48-74	A	74						74	60	120	-	-
48-90	A	90				10	80		-	-	-	-
48-106	A	106					106		-	-	-	-





*Railway only


Amphenol Bayonet Coupling Connectors

ADG, ADGC Series

Contact Arrangements

							
Insert Arrangement	10SL-2	Front of Socket Insert 10SL-3	Front of Socket Insert 10SL-4	14SL-1	14SL-2	14S-5	14S-6
Service Rating	A	A	A	A	Inst.	Inst.	Inst.
Number of Contacts	1	3	2	3	4	5	6
Contact Size	16	16	16	16	16	16	16

							
Insert Arrangement	14S-7	14S-9	14S-07	16S-1	16S-4	16S-5	16S-8
Service Rating	A	A	A	A	D	A	A
Number of Contacts	3	2	7	7	2	3	5
Contact Size	16	16	16	16	16	16	16

						
Insert Arrangement	16-9	16-10	16-11	16-12	16-13	18-1
Service Rating	A	A	A	A	A	B,C,F,G=A; Bal.=Inst.
Number of Contacts	2 2	3	2	1	2	10
Contact Size	12 16	12	12	4	12	16

CONTACT LEGEND








Amphenol Bayonet Coupling Connectors

ADG, ADGC Series

Contact Arrangements

Insert Arrangement	18-3	18-4	18-5	18-8	18-9	18-10
Service Rating	D	D	D	A	Inst.	A
Number of Contacts	2	4	2 1	1 7	2 5	4
Contact Size	12	16	12 16	12 16	12 16	12

Insert Arrangement	18-11	18-12	18-13	18-15	18-19	18-20
Service Rating	A	A	A	A	A	A
Number of Contacts	5	6	1 3	4	10	5
Contact Size	12	16	8 12	12	16	16

Insert Arrangement	18-21	18-22	18-32	20-2	20-3	20-4
Service Rating	A	D	A	D	D	D
Number of Contacts	3	3	8	1	3	4
Contact Size	12	16	16	0	12	12



Amphenol Bayonet Coupling Connectors

ADG, ADGC Series

Contact Arrangements

Insert Arrangement	20-7	20-8	20-11	20-15	20-16
Service Rating	H,G=D;C,D,E,F=A	Inst.	Inst.	A	A
Number of Contacts	8	2 4	13	7	2 7
Contact Size	16	8 16	16	12	12 16
Insert Arrangement	20-17	20-18	20-19	20-22	20-23
Service Rating	A	A	A	A	A
Number of Contacts	5 1	3 6	3	3 3	2
Contact Size	12 16	12 16	8	8 16	8
Insert Arrangement	20-27	20-29	20-33	20-01	22-1
Service Rating	A	A	A	A	D
Number of Contacts	14	17	11	10	2
Contact Size	16	16	16	16	8

Amphenol Bayonet Coupling Connectors

ADG, ADGC Series

Contact Arrangements

Insert Arrangement	22-2	22-4	22-7	22-8	22-9
Service Rating	D	A	E	E	E
Number of Contacts	3	2 2	1	2	3
Contact Size	8	8 12	0	12	12

Insert Arrangement	22-10	22-11	22-12	22-13	22-14
Service Rating	E	B	D	E=D; A,B,C,D=A	A
Number of Contacts	4	2	2 3	4 1	19
Contact Size	16	16	8 16	12 16	16






Insert Arrangement	22-15	20-18	22-19	22-20	22-21
Service Rating	D=E; A,B,C,E,F=A	A,B,F,G,H=D; C,D,E=A	A	A	A
Number of Contacts	5 1	8	14	9	1 2
Contact Size	12 16	16	16	16	0 16













Amphenol Bayonet Coupling Connectors

ADG, ADGC Series

Contact Arrangements

					
Insert Arrangement	22-22	22-23	22-27	22-28	24-2
Service Rating	A	H=D; Ba.,=A	J=D; Bal.=A	A	D
Number of Contacts	4	8	1 8	7	7
Contact Size	8	12	8 16	12	12

					
Insert Arrangement	24-5	24-6	24-7	24-9	24-10
Service Rating	A	A,G,H=D; Bal.=A	A	A	A
Number of Contacts	16	8	2 14	2	7
Contact Size	16	12	12 16	4	8

					
Insert Arrangement	24-11	24-12	24-20	24-22	24-28
Service Rating	A	A	D	D	Inst.
Number of Contacts	3 6	2 3	2 9	4	24
Contact Size	8 12	4 12	12 16	8	16



CONTACT LEGEND 16 12 8 4 0 4/0

Amphenol®

Amphenol Bayonet Coupling Connectors


ADG, ADGC Series

Contact Arrangements


Insert Arrangement	24-02	24-03	28-1	28-3
Service Rating	A	A	A, J, E=D; Bal.=A	E
Number of Contacts	9	12	3 6	3
Contact Size	12	16	8 12	8
Insert Arrangement	28-6	28-7	28-9	28-10
Service Rating	D	D	D	G=D; Bal.=A
Number of Contacts	3	2	6 6	2 2 3
Contact Size	4	4	12 16	4 8 12
Insert Arrangement	28-11	28-12	28-15	
Service Rating	A	A	A	
Number of Contacts	4 18	26	35	
Contact Size	12 16	16	16	
⊕ ● ⦿ ○ ⊗ ⦶ CONTACT LEGEND 16 12 8 4 0 4/0				

Amphenol Bayonet Coupling Connectors ADG, ADGC Series Contact Arrangements


Insert Arrangement
Service Rating
Number of Contacts
Contact Size




28-16
A
20
16



28-17
M,N,P=D; A to 1
15
16




28-19
H,M=B; A,B=D; Bal.=A
4 6
12 16




Insert Arrangement
Service Rating
Number of Contacts
Contact Size


28-20
A
10 4
12 16



28-21
A
37
16




28-22
D
3 3
4 16




Insert Arrangement
Service Rating
Number of Contacts
Contact Size

28-51
A
12
12




32-1
A=E; B,C,D,E=D
2 3
0 12



32-5
D
2
0


CONTACT LEGEND




Amphenol Bayonet Coupling Connectors

ADG, ADGC Series


Contact Arrangements




Insert Arrangement	32-6			
Service Rating	A			
Number of Contacts	2	3	2	16
Contact Size	4	8	12	16




Insert Arrangement	32-7			
Service Rating	A, B, h, j = Inst.; Bal = A			
Number of Contacts	7	28		
Contact Size	12	16		




Insert Arrangement	32-8			
Service Rating	A			
Number of Contacts	6	24		
Contact Size	12	16		




Insert Arrangement	32-9			
Service Rating	D			
Number of Contacts	2		12	
Contact Size	4		16	




Insert Arrangement	32-15			
Service Rating	D			
Number of Contacts	2		6	
Contact Size	0		12	




Insert Arrangement	32-17			
Service Rating	D			
Number of Contacts			4	
Contact Size			4	



Insert Arrangement	32-22			
Service Rating	A			
Number of Contacts	54			
Contact Size	16			



Insert Arrangement	32-03			
Service Rating	A			
Number of Contacts	3			
Contact Size	4			



Insert Arrangement	32-59			
Service Rating	A			
Number of Contacts	2	40		
Contact Size	8	16		












CONTACT LEGEND

16 12 8 4 0 4/0


Amphenol Bayonet Coupling Connectors

ADG, ADGC Series

Contact Arrangements


Insert Arrangement Service Rating Number of Contacts Contact Size			
	36-1	36-3	36-4
	D	D	A=D; B,C=A
	4 18 12 16	3 3 0 12	3 0
Insert Arrangement Service Rating Number of Contacts Contact Size			
	36-5	36-7	36-8
	A	A	A
	4 0	7 40 12 16	1 46 12 16
Insert Arrangement Service Rating Number of Contacts Contact Size			
	36-9	36-10	36-15
	A	A	M=D; Bal.=A
	1 2 14 14 4 8 12 16	48 16	35 16
 CONTACT LEGEND 16 12 8 4 0 4/0			

Amphenol Bayonet Coupling Connectors ADG, ADGC Series Contact Arrangements




Insert Arrangement
Service Rating
Number of Contacts
Contact Size


36-52
A
52
16



36-30
A
30
12




36-40
A
22 18
12 16




Insert Arrangement
Service Rating
Number of Contacts
Contact Size


36-02
A
20
12



36-03
A
20
12




36-04
A
22
12




Insert Arrangement
Service Rating
Number of Contacts
Contact Size


*48-03
B
3
4/0




Amphenol Bayonet Coupling Connectors ADG, ADGC Series Contact Arrangements




Insert Arrangement	*48-06A	
Service Rating	D	
Number of Contacts	5	1
Contact Size	0	4




Insert Arrangement	*48-06B	
Service Rating	B	
Number of Contacts	3	3
Contact Size	4/0	12




Insert Arrangement	*48-66	
Service Rating	A	
Number of Contacts	66	
Contact Size	12	



Insert Arrangement	*48-74	
Service Rating	A	
Number of Contacts	74	
Contact Size	16	



Insert Arrangement	*70-90	
Service Rating	A	
Number of Contacts	80	10
Contact Size	12	8



Insert Arrangement	*70-106	
Service Rating	A	
Number of Contacts	106	
Contact Size	12	




* Special arrangement for railway


Amphenol Bayonet Coupling Connectors

ADG, ADGC Series


Accessories

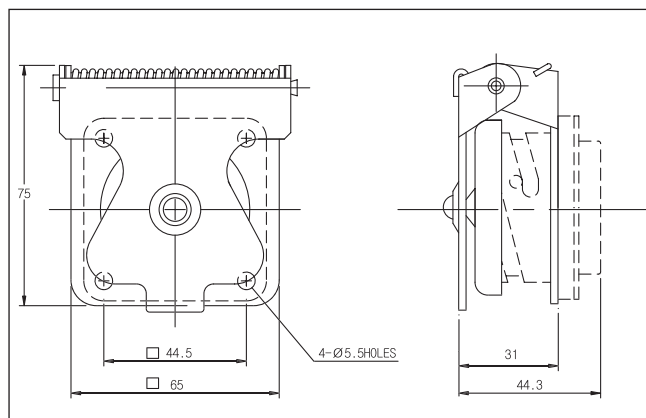


AMDC-28

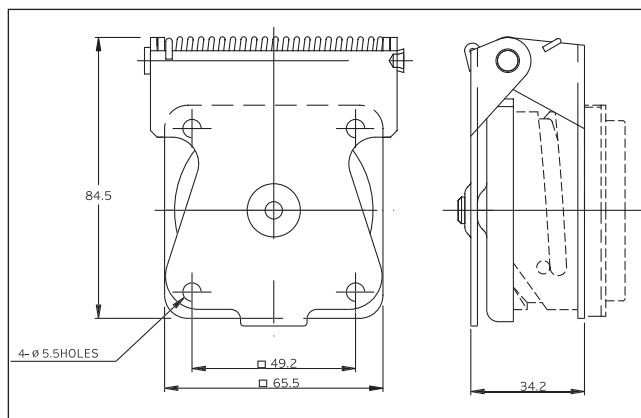


AMDC-36

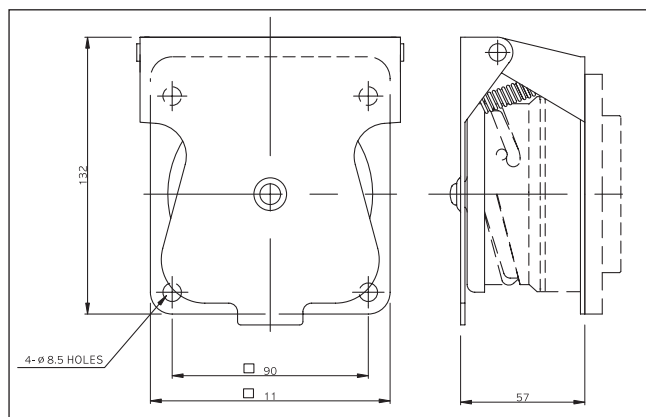

AMDC-48

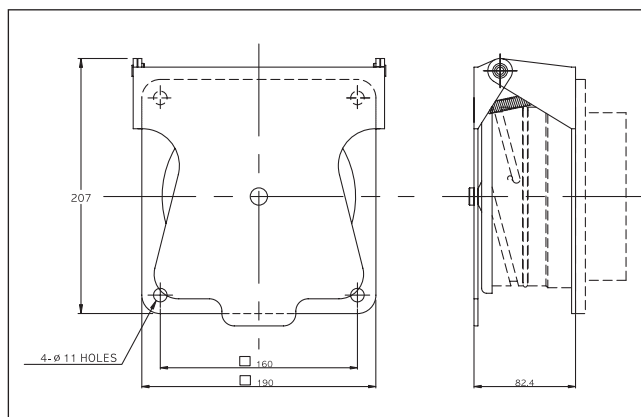

AMDC-70

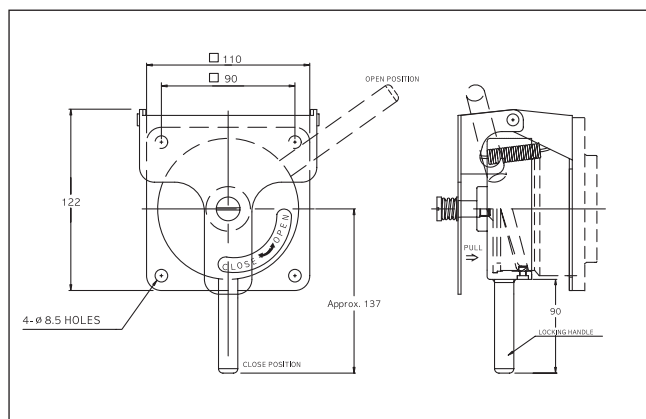

AMPC-MT48



Amphenol Bayonet Coupling Connectors

ADG, ADGC Series

Contact Dimension

Crimp contacts

Size	mm ² (Sq)	AWG	Ø A	Ø B	Ø C	Ø D	L	Fig
16	0.50~0.75	20	1.58	1.20	2.60	3.80	33.20	Male
16	1.00~2.00	16	1.58	2.00	2.90	3.80	33.20	
16	2.50~3.00	14	1.58	2.50	3.80	3.80	33.20	
12	0.50~0.75	20	2.40	1.20	2.60	5.70	38.50	
12	1.00~2.00	16	2.40	2.00	2.90	5.70	38.50	
12	2.50~3.00	14	2.40	2.50	3.80	5.70	38.50	
12	4.00	12	2.40	3.00	4.80	5.70	38.50	
12	6.00	10	2.40	3.60	4.80	5.70	38.50	
8	3.00	12	3.60	2.50	3.80	8.00	41.70	
8	4.00	11	3.60	3.00	4.80	8.00	41.70	
8	6.00	10	3.60	3.50	4.80	8.00	41.70	
8	10.00	8	3.60	4.60	6.80	8.00	41.70	Female
4/0	16.00	5	14.00	9.50	6.20	23.30	80.90	
4/0	25.00	3	14.00	9.50	7.80	23.30	80.90	
4/0	35.00	2	14.00	14.40	9.00	23.30	80.90	
4/0	38.00	2	14.00	14.40	9.50	23.30	80.90	
4/0	50.00	1	14.00	14.40	10.70	23.30	80.90	
4/0	70.00	2/0	14.00	20.00	14.40	23.30	80.90	
4/0	95.00	3/0	14.00	20.00	15.50	23.30	80.90	
16	0.50~0.75	20	1.65	1.20	2.60	3.80	38.00	
16	1.00~2.00	16	1.65	2.00	2.90	3.80	38.00	
16	2.50~3.00	14	1.65	2.50	3.80	3.80	38.00	
12	0.50~0.75	20	2.48	1.20	2.60	5.70	38.50	
12	1.00~2.00	16	2.48	2.00	2.90	5.70	38.50	
12	2.50~3.00	14	2.48	2.50	3.80	5.70	38.50	
12	4.00	12	2.48	3.00	4.80	5.70	38.50	
12	6.00	10	2.48	3.50	4.80	5.70	38.50	
8	3.00	12	3.70	2.50	3.80	8.00	41.70	
8	4.00	11	3.70	3.00	4.80	8.00	41.70	
8	6.00	10	3.70	3.60	4.80	8.00	41.70	
8	10.00	8	3.70	4.60	6.80	8.00	41.70	
4/0	16.00	5	14.00	9.50	6.20	23.30	81.50	
4/0	25.00	3	14.00	9.50	7.80	23.30	81.50	
4/0	35.00	2	14.00	14.40	9.00	23.30	81.50	
4/0	38.00	2	14.00	14.40	9.50	23.30	81.50	
4/0	50.00	1	14.00	14.40	10.70	23.30	81.50	
4/0	70.00	2/0	14.00	20.00	14.40	23.30	81.50	
4/0	95.00	3/0	14.00	20.00	15.50	23.30	81.50	

Above contacts used to **over 48 size** shell only.



Amphenol®

Amphenol Bayonet Coupling Connectors


ADG, ADGC Series

Contact Dimension

Crimp contacts

Size	mm ² (Sq)	AWG	Ø A	Ø B	Ø C	Ø D	L	Fig
16	1.00 ~ 1.50	16	1.57	1.80	2.75	3.20	31.90	male 
12	2.50 ~ 3.00	14	2.40	2.50	3.80	4.80	37.30	
8	3.80 ~ 4.20	12	3.60	4.60	6.80	7.50	38.60	
4	22.00	4	5.70	7.50	9.50	11.00	39.60	
0	60SQ	1/0	9.08	11.40	14.30	15.00	40.50	
16	1.00 ~ 1.50	16	2.60	1.80	2.75	3.20	36.90	Female 
12	2.5 ~ 3.00	14	2.45	2.50	3.80	4.80	37.10	
8	3.80 ~ 4.20	12	5.00	4.60	6.80	7.50	38.40	
4	22.00	4	5.80	7.50	9.50	11.00	39.50	
0	60SQ	1/0	9.20	11.60	14.30	15.00	40.30	

Above contacts used to **under 36** size shell only.

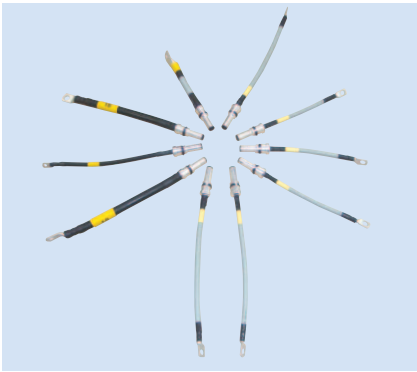

Amphenol Bayonet Coupling Connectors ADG, ADGC Series Characteristics

1. Material characteristics

Shell	Aluminium or Aluminium alloy	Indicated for indoor and outdoor not particularly heavy application.
Insulator	Synthetic rubber Plastic with silicon gasket	Under 36 size shell / Synthetic rubber. Over 48 size shell / Plastic with silicon gasket. Fire resistant & temperature range -40°C to 125°C
Contact	Copper alloy	Silver or gold plating.
Durability	500 Cycle connection/Disconnection	

2. Contact arrangement service rating & Dielectric strength

Service rating	MIN.Flashover AC(rms)	Test voltage AC(rms)*	Operating voltage	
			AC	DC
Inst	1,400V	1,000	200	250
A	2,800V	2,000	500	700
D	3,600V	2,800	900	1,250
E	4,500V	3,500	1,250	1,750
B	5,700V	4,500	1,750	2,450
C	8,500V	7,000	3,000	4,200

* According to Mil-C-5015

The connectors do not show any signs of breakdown when the test voltage indicated in the table is applied for one minute between the two closest contacts and between the shell any of the contacts to the shell.

3. Electrical data

Size	MAX.Current*	Test current DC A	MAX.Voltage drop** (mV)
#16	22A	13A	74
#12	41A	23A	65
#8	73A	46A	63
#4	135A	80A	58
#0	245A	150A	53
#4/0	450A	350A	53

* Applicable for short time.

** According to MIL-C- 39029D, Test with nickel-plated wire.



Amphenol Bayonet Coupling Connectors

ADG, ADGC Series


How to order

<u>ADG</u>	<u>08A</u>		<u>18-10</u>	<u>P</u>	<u>W</u>		
<u>ADGC</u>	<u>08A</u>	<u>G</u>	<u>48-03</u>	<u>P</u>	<u>W</u>	<u>5K</u>	<u>(XXX)</u>
1	2	3	4	5	6	7	8

1. Connector Type
ADG - Amphenol Daeshin Bayonet connector (Solder)
ADGC - Amphenol Daeshin Bayonet connector (Crimp)
2. Connector Style
00A - Wall mounting receptacle
01A - Cable connecting plug
02A - Box mounting receptacle
06A - Straight plug
08A - Right angle plug (45° degrees angle back shell)
3. Service Class
Without letter-Normal type
G - RFI (Radio Frequency interference) Grounding Finger Type
4. Shell size and insert arrangement - see tables, pages 72.73.74
5. Contact Types
P- designates pin contact, (+) Male
S- designates socket contact, (-) Female
6. Insert Rotation
Without letter - Normal type
"W", "X", "Y", or "Z" - See page 72.73
7. Polarization Keys
Without letter - Normal
5K - 5 keys (Only available for 48, 70 Size)
8. Plating information
No suffix - Olive Drab Zinc
CD - Cadmium
P1 - Black paint
426 - Electro-less Nickel & gold flash contacts
608 : Black Zinc
621 - Black Zinc
640 - Conductive Black zinc alloy
689 - Electro-less Nickel & gold flash contacts

Amphenol Bayonet Coupling Connectors ADG, ADGC Series Tool Information

Contact Size	Wire Size (mm ² /AWG)	Tool Part Nr		Applicate Insert arrange
		For crimping	For removal	
#16	0.5 ~ 0.75	TP201411-AG or DMC CAGE11851	AMET-JC 16/12	48-74
	1.0 ~ 2.0			
	2.5 ~ 3.0			
#12	1.0 ~ 2.0mm ²	TP201411-AG DMC CAGE11851 TP-201328-12D	AMET-JC 16/12	48-06 70-90 700-106
	2.5mm ²			
	12 AWG			
	4.0mm ²			
#8	3.0 (14AWG)	TP-201328-8D	AMET-JC8	70-90
	4.0 (14AWG)			
	6.0 (10AWG)			
	8 AWG			
#4/0	35	TP-201328-41G or IZUMIEP-510B	AMET-JC4/0	48-03 48-04 48-06
	50			
	70			
	95			

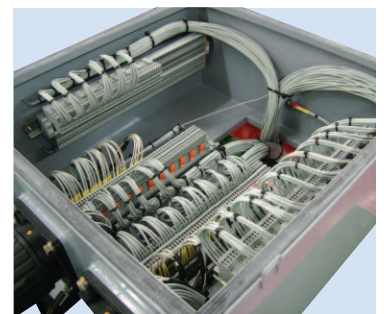

Description	Part Nr	Fig
Crimping Tool	TP201411-AG	
	DMC CAGE11851	
	TP-201328	
	IZUMIEP-510B	
Removal Tool	AMET-JC16/12	
	AMET-JC4/0	
Insertion Tool	BMD-297-16	
	BMD-297-12	



High Tension Connectors AMHTC Series

Amphenol High Tension Connectors AMHTC Series



AMPF Box mounting Receptacle



AMLM Straight Plug



HLPF Box mounting Receptacle



HLLM Straight Plug



SLPF Box mounting Receptacle



SLLM Straight Plug

1. Introduction

Amphenol “AMHTC” high tension connector series for railway vehicle installable power distribution systems, offers the ultimate in safety and reliability under the most severe operating conditions.

The AMHTC series connectors allow the user to connect electrical equipment quickly with ultimate safety.

AMHTC is available in two standard formats, which allow complete hook up through the standard daisy chain principle.

2. Features

- Dead front contacts: An insulated tip on the contact element prevents accidental touching of current carry parts. Both the male and female contacts are protected.
- Super High impact Insulators: High impact, flame retardant thermoplastic insulators prevent impact and abrasion damage through continued use in harsh environment applications and also guarantee a high degree of insulation, with maximum resistance to oil, acids and water.
- Water proof when mated: Sealing is guaranteed through IP rated interfacial and cable gland compression seals. Connectors when mated are rated at up to IP67.

Item	Material	Finish	Remarks
Shell	Plastic	-	Fire resistant -30~125°C
Contact	Copper alloy	Sliver Plating	-

4. Technical Data


Item	High Lock		Low Lock
	AMPF, AMLM	HLPF, HLLM	SLPF, SLLM
Continuous Current Rating	660A@ambient<70°C	350A@ambient<70°C	250A@ambient<70°C
Maximum Current Rating	750A	450A	400A
Contact Size	Special	#4/0	#4/0
Maximum Rated Voltage to Earth	2Kv AC / 3Kv DC	3Kv AC / 4.2Kv DC	1.5Kv AC
Minimum Flashover	9.5Kv DC Peak	12.5Kv DC Peak	-
Operating Temperature Range	-30 °C ~ 125 °C		
Insulation Resistance	Min 100 MΩ @ DC 1,000V		
Ingress Protection (mated)	IP67		
Protection against Electric Shock	IP2X		
Flammability	UL94-V0		

Amphenol High Tension Connectors Amphenol AMHTC Connectors

High Lock Box mounting receptacle

(mm)


- AMPF TYPE: Female insulator rear panel mounting receptacle.

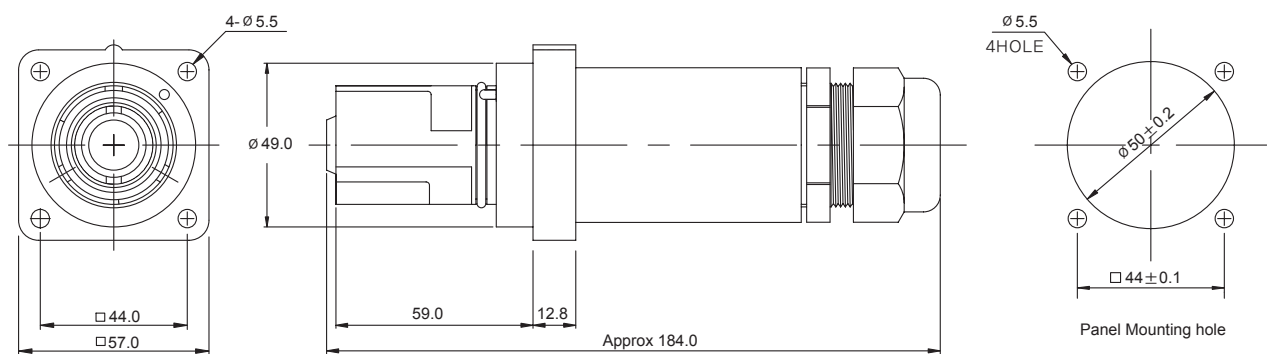

High Lock Straight Plug

(mm)

- AMLM TYPE: Male insulator line plug.

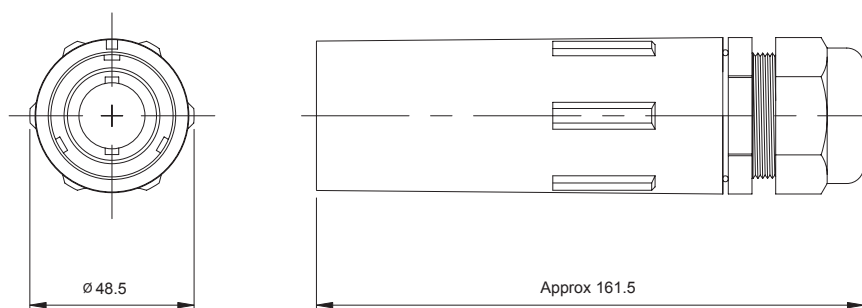


Amphenol High Tension Connectors

Amphenol AMHTC Connectors

High Lock Box mounting receptacle

(mm)


- HLPF TYPE: Female insulator front panel mounting receptacle.

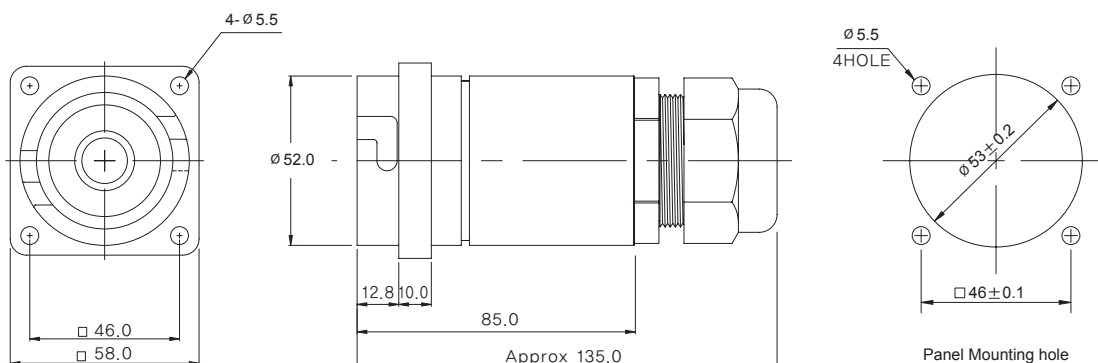

High Lock Straight Plug

(mm)

- HLLM TYPE: Male insulator line plug.

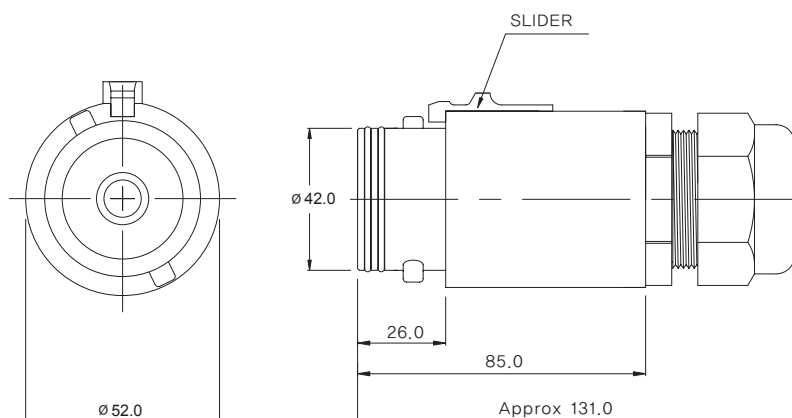


Amphenol High Tension Connectors Amphenol AMHTC Connectors

Low Lock Box mounting receptacle

(mm)


- SLPF TYPE: Female insulator front panel mounting receptacle.

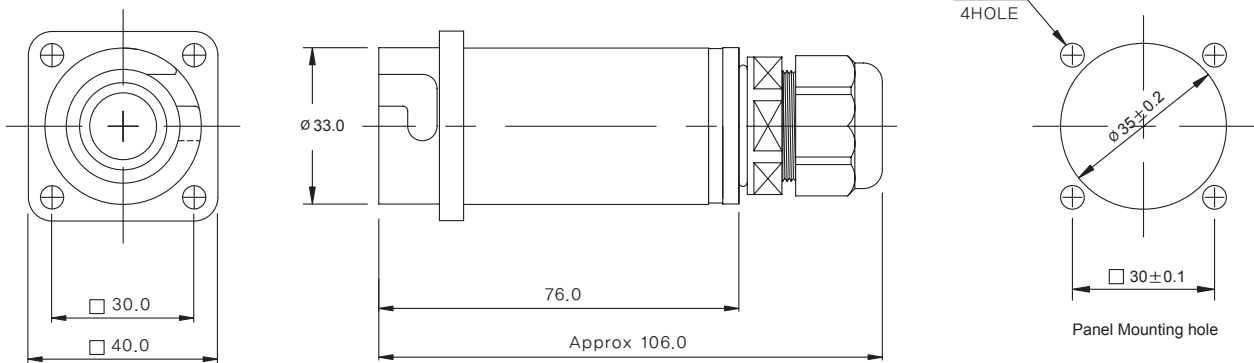

Low Lock Straight Plug

(mm)

- SLLM TYPE: Male insulator line plug.

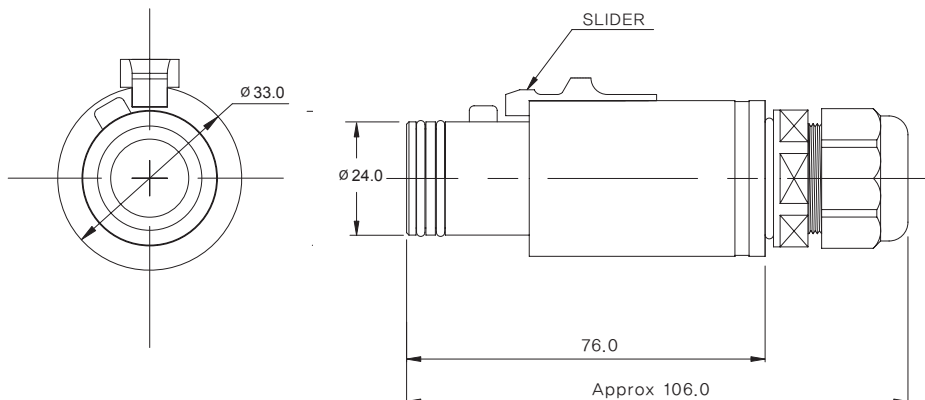


Amphenol High Tension Connectors

AMHTC Series

Accessories Dimension

Receptacle Protection Cap

(mm)

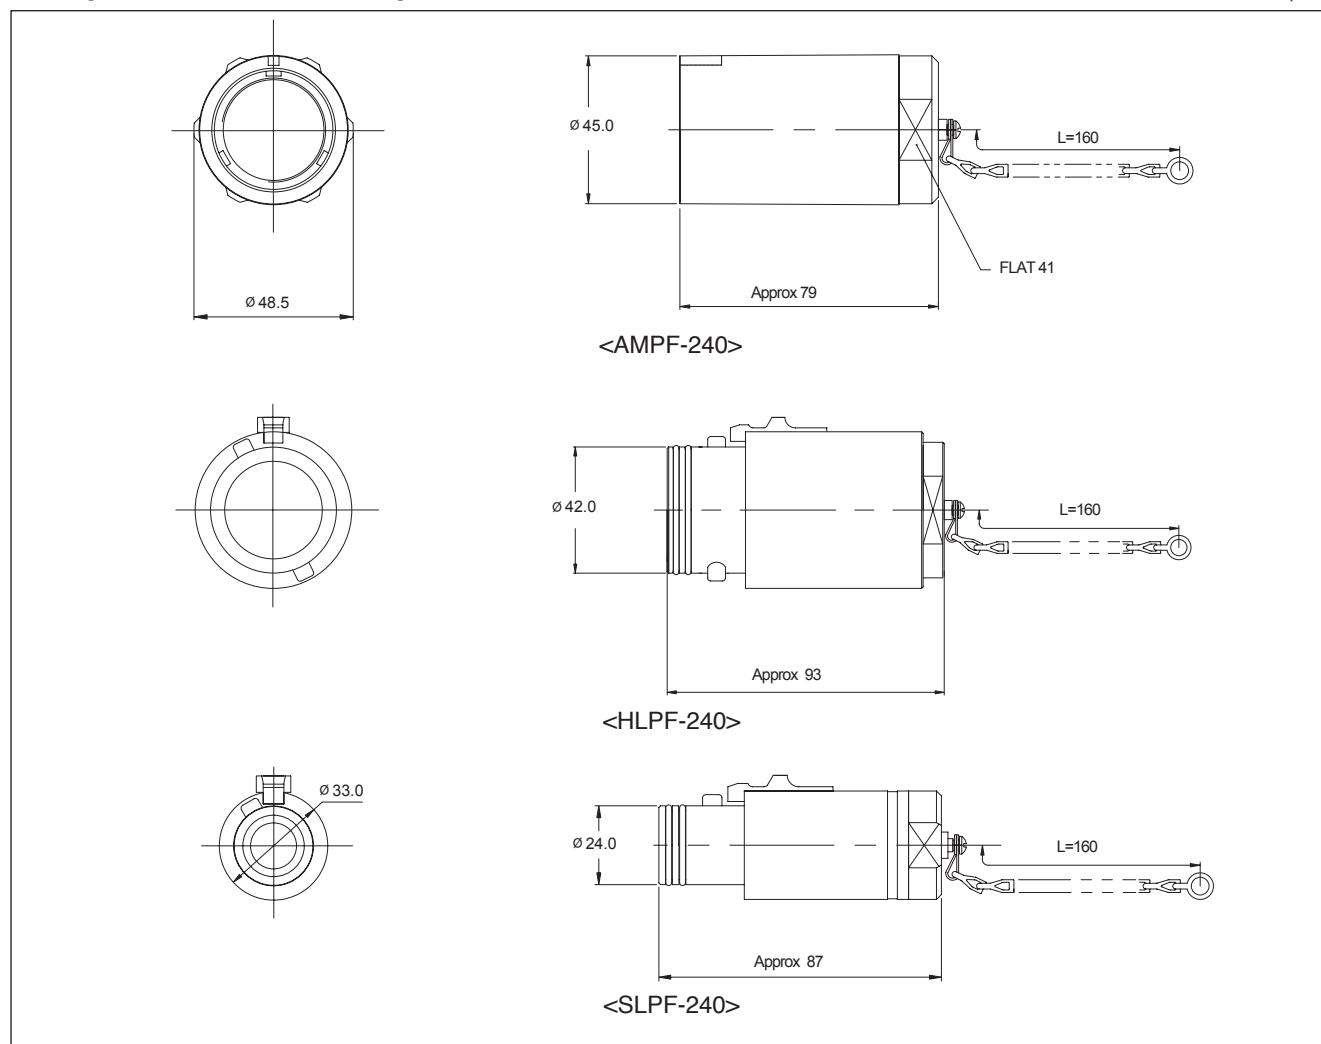

Amphenol High Tension Connectors

Amphenol AMHTC Series

How to order

$\frac{\text{AMPF}}{1} - \frac{\text{S}}{2} - \frac{\text{BK}}{3} - \frac{\text{C95}}{4} - \frac{29}{5}$

1. Connector Type

High Lock		Low Lock	Remarks
AMPF	HLPF	SLPF	Panel Female connector
AMLM	HLLM	SLLM	Line Male connector

2. Contact Gender

S: Socket

P: Pin

3. Colour

Bk: Black

Y : Yellow

R : Red

BL: Blue

GN: Green

4. Contact type

C240 : 240 mm² ~ Crimp

C200 : 200 mm² ~ Crimp

C185 : 185 mm² ~ Crimp

C120 : 120 mm² ~ Crimp

C95 : 95 mm² ~ Crimp

C70 : 70 mm² ~ Crimp

C50 : 50 mm² ~ Crimp

C35 : 35 mm² ~ Crimp

C25 : 25 mm² ~ Crimp

C14 : 14 mm² ~ Crimp

5. Cable grip(Consult factory)

13.5 : PG13.5 (6 ~ 12mm cable OD)

16 : PG16 (10 ~ 14mm cable OD)

21 : PG21 (13 ~ 18mm cable OD)

29 : PG29 (18 ~ 25mm cable OD)

36 : PG36 (22 ~ 32mm cable OD)

M20S : M20X1.5 (6 ~ 12mm cable OD)

M20L : M20X1.5 (10 ~ 14mm cable OD)

M25 : M25X1.5 (13 ~ 18mm cable OD)

M32 : M32X1.5 (18 ~ 25mm cable OD)

M40 : M40X1.5 (22 ~ 32mm cable OD)



Amphenol High Tension Connectors AMHTC Series

Contact Size	Wire Size (mm ² /AWG)	Crimping Tool No.	Removal Tool No.	Remarks
Special Pin	50 mm ²	IZUMI EP-510	AMET-HTCSP	AMLM
	70 mm ²			
	90 mm ²			
	120 mm ²			
	185 mm ²			
Special Socket	50 mm ²	IZUMI EP-510	AMET-HTCSP	AMPF
	70 mm ²			
	90 mm ²			
	120 mm ²			
	185 mm ²			
#4/0 Pin	16 mm ²	TP=201328 or IZUMI EP-510B	AMET-JC4/0	HLLM
	25 mm ²		AMET-SLLM	SLLM
	35 mm ²			
	38 mm ²			
	50 mm ²			
	70 mm ²			
	95 mm ²			
#4/0 Socket	16 mm ²	TP=201328 or IZUMI EP-510B	AMET-JC4/0	HLPF SLPF
	25 mm ²			
	35 mm ²			
	38 mm ²			
	50 mm ²			
	70 mm ²			
	95 mm ²			



TP-201328



AMET



IZUMI EP-510B

AFRICA

Amphenol South Africa
Phone : +27-11-783-9517
Fax : +27-11-783-9519
Amphenol_Africa@csi.com

ARGENTINA

Amphenol Argentina
Phone : +54-11-4815-6886
Fax : +54-11-4814-5779
ventas@amphenol.com.ar

AUSTRIA

Amphenol GmbH
Phone : +43-2239-379-519
Fax : +43-2236-205-550
info@amphenol-at.com

AUSTRALIA

Amphenol Australia Pty Ltd.
Phone : +61-3-8796-8888
Fax : +61-3-8796-8801
info@amphenol.com.au

BRAZIL

Amphenol do Brazil Ltda.
Phone : +55-11-3815-1003
Fax : +55-11-3815-1629
ventas@amphenol.com.br

BRAZIL

Amphenol TFC do Brazil Ltda.
Phone : +55-19-3757-1166
Fax : +55-19-3257-1255
info@amphenol-tfc.com.br

CANADA

Amphenol-Air LB North America
Phone : +1-514-421-2153
Fax : +1-514-421-3408
info@amphenol-airlb.com

CANADA

Amphenol Canada Corp
Phone : +1-416-291-4401
Fax : +1-416-292-0647
sales@amphenolcanada.com

CANADA

Amphenol Fiber Canada Ltd.
Phone : +1-613-432-8566
Fax : +1-613-432-9373
info@timesfiber.com

CHINA - Beijing

Amphenol China, Beijing Office
Phone : +86-10-6468-4019
Fax : +86-10-6468-4020
achn@amphenol.com.cn

CHINA - Changzhou

Amphenol-TFC(Changzhou) Comm
Phone : +86-519-510-3118
Fax : +86-519-510-5897
70752.2540@compuserve.com

CHINA - Changzhou

Amphenol Tuchel Electronics
Phone : +86-519-511-0301
Fax : +86-519-511-0299
info@amphenol-cz.com

CHINA - Changzhou

Changzhou Amphenol Fuyang Comm
Phone : +86-519-648-2967
Fax : +86-519-648-3480
fuyanginfo@amphenol.com.cn

CHINA - Guangzhou

Guangzhou Amphenol Electronics Comm
Phone : +86-20-3869-8808
Fax : +86-20-3869-7810
info@gecamphenol.com

CHINA - Hong Kong

Amphenol East Asia Limited
Phone : +852-2699-2663
Fax : +852-2688-0974
info@amphenol.com.hk

CHINA - Shanghai

Shanghai Amphenol Airwave Comm
Phone : +86-21-5763-0656
Fax : +86-21-5763-3575
iSAA@amphenol-saa.com.cn

CHINA - Shenzhen

Amphenol East Asia Elec. Tech.
Phone : +86-755-2717-7945
Fax : +86-755-2717-7622
info@amphenol.com.cn

FRANCE

Amphenol - Air LB S.A.S.
Phone : +33-3-2422-7849
Fax : +33-3-2422-7850
contact@amphenol-airlb.fr

FRANCE

Amphenol Socapex S.A.S. Mil/Aero
Phone : +33-4-5089-2800
Fax : +33-4-5096-1941
info.export@amphenol-socapex.fr

FRANCE

Amphenol Socapex S.A.S. Telecom
Phone : +33-3-8482-9400
Fax : +33-8482-9411
info@amphenol-socapex.fr

GERMANY

Amphenol-Air LB GmbH
Phone : +49-6831-981-000
Fax : +49-6831-981-030
info@amphenol-airlb.de

GERMANY

Amphenol Tuchel Electronics
Phone : +49-7131-929-0
Fax : +49-7131-929-486
info@amphenol.de

GERMANY

Konfektion E Elektronik GmbH
Phone : +49-7957-9886-0
Fax : +49-7957-9886-50
info@konfe.de

INDIA

Amphenol Interconnect India private
Phone : +91-20-7120363
Fax : +91-20-712-9158
sales@amphenol-in.com

ITALY

Amphenol Italia S.P.A.
Phone : +39-02-932-541
Fax : +39-02-932-544-44
info@amphenol-it.com

JAPAN

Amphenol Japan Infocom
Phone : +81-45-473-9191
Fax : +81-45-473-9203
info@amphenol.co.jp

JAPAN

Amphenol Japan Mil/Aero & Industrial
Phone : +81-77-553-8501
Fax : +81-77-551-2200
info@amphenol.co.jp

KOREA

Amphenol Daeshin Electronics
Phone : +82-32-610-3800
Fax : +82-32-673-2507
info@amphenol.co.kr

KOREA

Amphenol Korea Air Electronics Co., Ltd.
Phone : +82-31-419-1118
Fax : +82-31-354-7014
kaeinfo@amphenol.co.kr

KOREA

U-Jin Cable Industrial Co., Ltd.
Phone : +82-41-864-0858
Fax : +82-41-864-0436
u-jin@u-jincable.com

MALAYSIA

Amphenol Malaysia Sdn Bhd
Phone : +60-4-644-8628
Fax : +60-4-644-9628
info@amphenol.com.sg

MEXICO

Amphenol Corp. Mexico
Phone : +52-55-5258-9984
Fax : +52-55-5081-6890
info@amphenolmexico.com

MEXICO

TFC-Amphenol CATV Connector Ops.
Phone : +1-520-397-7095
Fax : +1-520-397-7096
info@timesfiber.com

NETHERLANDS

Amphenol European Sales Operations
Phone : +31-30-635-8000
Fax : +31-30-637-7034
info@amphenol-nl.com

SINGAPORE

Amphenol Pacific Sales Operations
Phone : +65-294-2128
Fax : +65-294-3522
info@amphenol.com.sg

SPAIN

Amphenol Espana(Iberica)
Phone : +34-91-640-7302
Fax : +34-91-640-7307
info@amphenol-it.com

SWEDEN

Amphenol ConneXus AB
Phone : +46-8-5454-7070
Fax : +46-832-04-90
info@amphenol.se

SWEDEN

Amphenol Scandinavia AB
Phone : +46-8-594-10440
Fax : +46-8-590-33800
info@amphenol-se.com

TAIWAN

Amphenol RF Asia Corp.
Phone : +886-6-266-1011
Fax : +886-6-266-4633
info@amphenolkj.com.tw

TAIWAN

Amphenol Taiwan Corporation
Phone : +886-3-379-5677
Fax : +886-6-360-7259
info@amphenol.com.tw

UNITED KINGDOM

Amphenol Ltd.
Phone : +44-1227-773-200
Fax : +44-1227-276-571
info@amphenol.co.uk

USA - Danbury, CT

Amphenol RF
Phone : +1-203-743-9272
Fax : +1-203-796-2032
webmail@amphenolrf.com

USA - Endicott, NY

Amphenol Interconnect Products Corp.
Phone : +1-607-754-4444
Fax : +1-607-786-4311
sales@aipce.com

USA - Hamden, CT

Amphenol Spectra-Strip Operation
Phone : +1-203-281-3200
Fax : +1-203-281-5872
sales@spectra-strip.com

USA-HQ Wallingford, CT

Amphenol Corporation
Phone : +1-203-265-8900
Fax : +1-203-265-8516
aphinfo@amphenol.com

USA - Lisle, IL

Amphenol Fiber Optic Products
Phone : +1-630-960-1010
Fax : +1-630-810-5880
sales@amphenol-fiberoptics.com

USA - Nashua, NH

Amphenol Backplane Systems
Phone : +1-603-883-5100
Fax : +1-603-883-0171
contact@amphenol-ABS.com

USA - Nashua, NH

Advanced Circuit Technology
Phone : +1-603-880-6000
Fax : +1-603-880-1785
marketing@act-flexcircuit.com

USA - Sidney, NY

Amphenol Aerospace Operations
Phone : +1-607-563-5011
Fax : +1-607-563-5157
contact@sidney.amphenol-aerospace.com

USA - Sugarland, TX

Amphenol Assemble Tech
Phone : +1-281-340-6500
Fax : +1-281-340-6510
cables@assembletech.com

USA - Vernon Hills, IL

Amphenol T & M Antennas
Phone : +1-847-478-5600
Fax : +1-847-478-5735
saales@antennas.com

USA - Wallingford, CT

Times Fiber Communications
Phone : +1-203-265-8500
Fax : +1-203-265-8422
info@timesfiber.com

Amphenol
www.amphenol.co.kr
www.amphenol.com

Amphenol®

Amphenol Daeshin

588 Songnae-dong, Sosa-Gu,
Bucheon-City, Kyunggi-Do, Korea
Phone:82-32-610-3800 Fax:82-32-673-2507
www.amphenol.co.kr
Information mail : info@amphenol.co.kr