

VariaPro



VariaPro


CABLE GLANDS FOR SPECIAL CHALLENGES

VariaPro: Four for all cases

Demanding markets with special challenges – these are the ideal conditions for VariaPro. The new cable glands are designed for extreme environments. The product family includes four variants with different capabilities for very special requirements. However, they all have one thing in common: the HUMMEL quality appreciated by customers.

What also connects the cable glands of the VariaPro series:

- // Very robust design
- // Protection IP 68 to 10 bar
- // Integrated EMC connection
- // Slim structure
- // Simple assembly

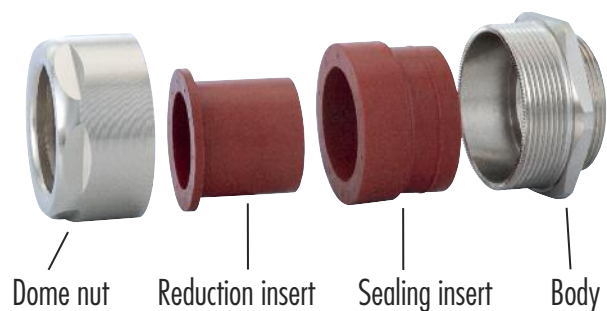


VariaPro Rail

Metr.



Material	Nickel plated brass
Seal/O-Ring	EPDM
Protection	IP 68 – 10 bar within the specified clamping range
Operating Temperature	-40 °C – 100 °C (-40 °F – 212 °F)

- // DIN EN 45545-2 and DIN EN 45545-3
- // Fire resistance E30



AG	\varnothing mm	GL	H mm	\varnothing mm Dome Nut	\varnothing mm Body	Number
M 20 x 1,5	7,0–14,0	6	27	22	24	1.750.2000.50*
M 20 x 1,5	10,0–14,0	6	27	22	24	1.750.2000.51
M 25 x 1,5	11,0–18,0	7	29	27	30	1.750.2500.50*
M 25 x 1,5	14,5–18,0	7	29	27	30	1.750.2500.51
M 32 x 1,5	16,0–25,0	8	34	36	40	1.750.3200.50*
M 32 x 1,5	20,5–25,0	8	34	36	40	1.750.3200.51
M 40 x 1,5	21,0–32,0	8	40	46	50	1.750.4000.50*
M 40 x 1,5	26,5–32,0	8	40	46	50	1.750.4000.51

* Versions with removable reducers


VariaPro Temp

Metr.



Material	Nickel plated brass
Seal/O-Ring	VMQ (Silikon)
Protection	IP 68 – 10 bar within the specified clamping range
Operating Temperature	-60 °C – 200 °C

- // Suitable for absolute low temperature applications
- // Also ideal for high temperatures up to 200 °C



AG	\varnothing mm	GL	H mm	\varnothing mm Dome Nut	\varnothing mm Body	Number
M 20 x 1,5	7,0–14,0	6	27	22	24	1.751.2000.50*
M 20 x 1,5	10,0–14,0	6	27	22	24	1.751.2000.51
M 25 x 1,5	11,0–18,0	7	29	27	30	1.751.2500.50*
M 25 x 1,5	14,5–18,0	7	29	27	30	1.751.2500.51
M 32 x 1,5	16,0–25,0	8	34	36	40	1.751.3200.50*
M 32 x 1,5	20,5–25,0	8	34	36	40	1.751.3200.51
M 40 x 1,5	21,0–32,0	8	40	46	50	1.751.4000.50*
M 40 x 1,5	26,5–32,0	8	40	46	50	1.751.4000.51

* Versions with removable reducers

VariaPro FKM


Metr.



Material	Nickel plated brass
Seal/O-Ring	FKM
Protection	IP 68 – 10 bar within the specified clamping range
Operating Temperature	-20 °C – 180 °C (-4 °F – 356 °F)

- // High resistance to acids and chemicals
- // Suitable for the process industry

RoHS EMC



AG	\varnothing mm	GL	H mm	\varnothing mm Dome Nut	\varnothing mm Body	Number
M 20 x 1,5	7,0–14,0	6	27	22	24	1.752.2000.50*
M 20 x 1,5	10,0–14,0	6	27	22	24	1.752.2000.51
M 25 x 1,5	11,0–18,0	7	29	27	30	1.752.2500.50*
M 25 x 1,5	14,5–18,0	7	29	27	30	1.752.2500.51
M 32 x 1,5	16,0–25,0	8	34	36	40	1.752.3200.50*
M 32 x 1,5	20,5–25,0	8	34	36	40	1.752.3200.51
M 40 x 1,5	21,0–32,0	8	40	46	50	1.752.4000.50*
M 40 x 1,5	26,5–32,0	8	40	46	50	1.752.4000.51

* Versions with removable reducers


HSK-INOX-HD-Pro

Metr.



Material HD-enclosure	INOX 1.4404
Sealing HD-enclosure	VMQ (Silicone), blue (similar RAL 5012)
Protection	IP 66, IP 68 to 10 bar, IP 69K
Operating Temperature	-40 °C – 120 °C (-40 °F – 248 °F)

- // EHEDG certified
- // Successful VDMA riboflavin test



AG	\varnothing mm	GL mm	H mm	D mm	\varnothing mm	Number
M 12 x 1,5	5–6,5	6	19	21	14	1.740.1203.50
M 16 x 1,5	7,5–10	6	20	27	19/21	1.740.1603.50
M 16 x 1,5	6–7,5	6	20	27	19/21	1.740.1603.51
M 20 x 1,5	11–13,5	6	22,5	33	24/27	1.740.2003.50
M 20 x 1,5	9–12	6	22,5	33	24/27	1.740.2003.51
M 25 x 1,5	15–18	7	23,5	38	30	1.740.2503.50
M 25 x 1,5	14–16	7	23,5	38	30	1.740.2503.52
M 32 x 1,5	21–25	8	26,5	45	36	1.740.3203.50
M 32 x 1,5	18–21	8	26,5	45	36	1.740.3203.51

VariaPro Rail



VariaPro
Rail



- // DIN EN 45545-2 and DIN EN 45545-3
- // Fire resistance E30
- // For all trains in the European network
- // Integrated EMC connection
- // Large clamping range due to reducing insert
- // Integrated anti-twist protection during cable installation

VariaPro Temp



VariaPro
Temp



- // For applications under extreme conditions
- // Suitable for absolute low temperature applications
- // Also ideal for high temperatures up to 200 °C
- // Integrated EMC connection
- // Large clamping range due to reducing insert
- // Integrated anti-twist protection during cable installation

VariaPro FKM



VariaPro
FKM



- // High resistance to acids and chemicals
- // Suitable for the process industry
- // For applications in chemistry, pharma or biotechnology
- // Integrated EMC connection
- // Large clamping range due to reducing insert
- // Integrated anti-twist protection during cable installation

HSK-INOX-HD-Pro



HSK-INOX-HD-Pro
EHEC certified



- // EHEDG certified
- // Successful VDMA riboflavin test
- // Designed for the food industry
- // Suitable for high pressure cleaning
- // Integrated EMC connection
- // Halogen- and phosphate-free

ELECTRIC COMPONENTS

Cable Glands

Polyamide-, Brass- and Stainless steel,
EMC-connections, Protection Ex e, Ex d, Ex ta



Circular Connectors

M 8 to M 40, INOX, TWILOCK, Industrial Ethernet,
Power, Signal, Hybrid-Connector, Moulded Cordsets




Conduit Systems

Corrugated Conduit Systems, Conduit Cable Glands, Angled Systems,
combined Cable Glands, Accessories



Cable Assembly

Moulded Signal- and Power Circular Connectors,
Servo Cables, Cable Sets

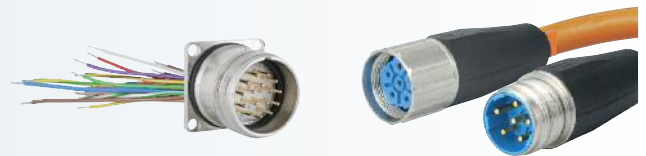

www.hummel.com

HUMMEL AG
Lise-Meitner-Straße 2
79211 Denzlingen
Germany
www.hummel.com

Tel. +49 (0) 76 66 / 9 11 10-0
Fax +49 (0) 76 66 / 9 11 10-20
E-Mail info@hummel.com

